

PRICE LIST INDUSTRY

OCTOBER 2026

MODVLS



brv
Bonetti Rubinetterie Valduggia S.r.l.

Notes:

Date: _____

[illegible]

Index

<i>Distribution units</i>	<i>Page</i>	<i>2</i>
ModvBox		2
DN20 Pump units, equipments and distributors		3-14
DN25 Pump units, equipments and distributors		15-32
Hot & cold buffer tanks		33
Multifunctional compact hydraulic module "Logico"		34
DN32 Pump units, equipments and distributors		35-44
Thermostatic mixing and diverting valves		45-48
Zone valves		49
Rotating mixing valves		50-52
Built-in adjustment unit		53-56
Climatic controllers		57
Actuators and room thermostat		58
<i>Solar Thermal</i>	<i>Page</i>	<i>59</i>
Solar pump units		60-66
Differential solar controllers		67
Equipments and accessories		68-71
Thermostatic mixing and diverting valves		72-74
Solar-boiler kit		75
Heat exchange solar unit		76
"Solo" heat supply solar pump unit		77-80
<i>DHW control</i>	<i>Page</i>	<i>81</i>
Pump units to deliver fresh domestic hot water		82-87
Hot domestic water recycling kit		88-89
<i>Biomass</i>	<i>Page</i>	<i>90</i>
Solid fuel pump units		91-96
Anti-condensing valves		97-99
Anti-condensing recycling pump		100
<i>Flowmeters</i>	<i>Page</i>	<i>101</i>
<i>Standard Products</i>	<i>Page</i>	<i>103</i>



402554-04M-HW
402554-04M-HV



402554ISO-04M-HW
402554ISO-04M-HV



MODVLVS

DISTRIBUTION BOX

ModvBox

DISTRIBUTION BOX

Modular multi-zone distribution box for wall-mounted gas boilers and heat pumps. With distribution manifold and integrated hydraulic compensator (-HW) or a simple distribution manifold (-HV). Available with or without insulation box. Max. 2 m³/h.

Conn. to primary	Code	Description	For HP	No. Modules	Max. power (ΔT=20 K)	Price	s.b.	m.c.
1"	402554-04M-HW	ModvBox with hydraulic compensator	no	3	50 kW	€ 600,40	1	-
1"	402554ISO-04M-HW	with hydraulic compensator and insulation	yes	3	50 kW	€ 666,38	1	-
1"	402554-04M-HV	ModvBox with distributor	no	3	50 kW	€ 587,44	1	-
1"	402554ISO-04M-HV	with distributor and insulation	yes	3	50 kW	€ 653,43	1	-



Direct



With motorized mixing valve



With fixed point mixing valve

MODVLVS

DISTRIBUTION BOX

ModvBox

PUMP UNITS

Pump units for distribution box

Conn. Users	Code	Pump units	Kvs	Max power. (ΔT=20 K)	Price with Wilo Para 15/6 SC	s.b.	m.c.
3/4" F	402554-P6	Direct	6,0	35 kW	€ 254,81	1	-
3/4" F	402554-M3-P6-TRM	Mixed, with 230V 3 point actuator	4,0	30 kW	€ 423,07	1	-
3/4" F	402554-F3-P6	Mixed, with 20-45°C fixed point	3,0	25 kW	€ 374,09	1	-

Pump units with left supply (except "Energy" series):

Description	Code	Price	s.b.	m.c.
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS
DN20 PUMP UNITS

M2
UNMIXED PUMP UNIT

Pump units without circulating pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
3/4"	M2	20255R	€ 141,60	1	-

Pump units with synchronous circ. pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
			Para 15/6 SC	UPM3S Auto 15-60	Para 15/8 SC		
3/4"	M2	Code:	20255R-P6	20255R-A6	20255R-P8	1	-
		Price:	€ 284,18	€ 284,18	€ 344,42		



MODVLVS
DN20 PUMP UNITS

M2 MIX3
MIXED PUMP UNIT WITH
3-WAY MIXING VALVE

Pump units without circulating pump. Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 4.0.

Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
3/4"	M2 MIX3	20255R-M3	€ 196,29	1	-

Pump units with synchronous circ. pump. Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 4.0.

Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
			Para 15/6 SC	UPM3S Auto 15-60	Para 15/8 SC		
3/4"	M2 MIX3	Code:	20255R-M3-P6	20255R-M3-A6	20255R-M3-P8	1	-
		Price:	€ 338,87	€ 338,87	€ 399,11		



TRM20 Actuator

MODVLVS

DN20 PUMP UNITS

M2 MIX3

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator

TRM20 actuator	Price increase:	€ 83,11	1	-
Ordering example: M2 MIX33 3/4" with TRM20 actuator: code 20255R-M3-(P6/A6/P8)-TRM				



MODVLVS

DN20 PUMP UNITS

M2 MIX33

MIXED PUMP UNIT FOR LOW TEMPERATURE,
WITH 3-WAY MIXING VALVE,
WITH BUILT-IN BYPASS

Pump units without circulating pump. Up to 33 kW (Δt 15 K) with an 8 m circulating pump. Kvs: 5.5.

Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
3/4"	M2 MIX3	20255R-M33	€ 200,61	1	-

Pump units with synchronous circ. pump. Up to 33 kW (Δt 15 K) with an 8 m circulating pump. Kvs: 5.5.

Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
			Para 15/6 SC	UPM3S Auto 15-60	Para 15/8 SC		
3/4"	M2 MIX3	Code:	20255R-M33-P6	20255R-M33-A6	20255R-M33-P8	1	-
		Price:	€ 343,31	€ 343,31	€ 403,56		



TRM20 Actuator

MODVLVS

DN20 PUMP UNITS

M2 MIX33

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator

TRM20 actuator	Price increase:	€ 83,11	1	-
Ordering example: M2 MIX33 3/4" with TRM20 actuator: code 20255R-M33-(P6/A8/P8)TRM				



MODVLVS

DN20 PUMP UNITS

M2 FIX3

MIXED PUMP UNIT WITH FIXED TEMPERATURE
THERMOSTATIC MIXING VALVE

Pump units with thermostatic mixing valve, without circulating pump.

Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
3/4"	M2 FIX3	20255R-(F1/F2)	€ 254,67	1	-

Pump units with synchronous circulating pump and thermostatic mixing valve.

Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
			Para 15/6 SC	UPM3S Auto 15-60	Para 15/8 SC		
3/4"	M2 FIX3	Code:	20255R-(F1/F2)-P6	20255R-(F1/F2)-A6	20255R-(F1/F2)-P8	1	-
		Price:	€ 397,25	€ 397,25	€ 457,49		

Versions

Version F1 : up to 4,5 kW (Δt 8 K) with a 6 m circulating pump.

Temperature setting range from 20°C up to 45°C, Kvs 2,0.

Example: code 20255R-F1; with Wilo Para 15/6 SC circulating pump, code: 20255R-F1-P6

Version F2 : up to 11 kW (Δt 20 K) with a 6 m circulating pump.

Temperature setting range from 45°C up to 70°C, Kvs 2,0.

Example. code 20255R-F2; with Wilo Para 15/6 SC circulating pump, code: 20255R-F2-P6

Approximate data for underfloor and radiators heating systems

Model	Field of regulation	Δt	Kvs	Approximate power and flow of the installation	Recommended circulating pump	Residual lifting power	Approximate surface of the underfloor heating system
F1	20-45°C	8 K	2,0	4,5 kW - 500 l/h	Wilo Para 15/6 SC	5 mH ₂ O	Up to a 50 m ²
F2	45-70°C	20 K	2,0	11 kW - 500 l/h	Wilo Para 15/6 SC	5 mH ₂ O	-
F1	20-45°C	8 K	2,0	9 kW - 1000 l/h	Wilo Para 15/8 SC	5 mH ₂ O	From 50 m ² to 100 m ²
F2	45-70°C	20 K	2,0	22 kW - 1000 l/h	Wilo Para 15/8 SC	5 mH ₂ O	-

Reference temperatures: Models F1: T_H: 55°C ; T_v: 24°C ; T_{MIX}: 32°C - Models F2: T_H: 75°C ; T_v: 40°C ; T_{MIX}: 55°C



MODVLVS

DN20 PUMP UNITS

M2 Energy

UNMIXED PUMP UNIT MADE FOR
THE FITTING OF AN ENERGY METER

"Energy" pump units without circulating pump, without energy meter.

Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

DN	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
20	3/4"	M2 Energy	202518-20	€ 175,66	1	-

Energy meter 3/4", connection 1", L=130 mm

"Energy" pump units with synchronous circulating pump, without energy meter.

Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

DN	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 15/6 SC	Grundfos UPM3S Auto 15-60	Wilo Para 15/8 SC		
20	3/4"	M2 Energy	Code:	202518-P6-20	202518-A6-20	202518-P8-20	1	-
			Price:	€ 318,23	€ 318,24	€ 378,48		

Energy meter 3/4", connection 1", L=130 mm

Approximate data of the Energy pump unit with the energy meter installed

Model	Energy meter	Δt	Kvs of the unit (*)	Approximate power and flow of the installation	Recommended circulating pump	Residual lifting power
M2 + G21	2,5 m ³ /h	20 K	3,8	23 kw - 1000 l/h	Wilo Para 15/6 SC	5 mH ₂ O
M2 + G21	2,5 m ³ /h	20 K	3,8	39 kw - 1700 l/h	Wilo Para 15/8 SC	5 mH ₂ O

(*) The indicated Kvs concerns the unit including the energy meter installed



MODVLVS

DN20 PUMP UNITS

M2 MIX3 Energy

MIXED PUMP UNIT WITH 3-WAY MIXING VALVE
MADE FOR THE FITTING OF AN ENERGY METER

"Energy" pump units without circulating pump, without energy meter.
Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 4.0.

DN	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
20	3/4"	M2 MIX3 Energy	202518-M3-20	€ 219,66	1	-

Energy meter 3/4", connection 1", L=130 mm

"Energy" pump units with synchronous circulating pump, without energy meter.
Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 4.0.

DN	Dim.	Item	Code:	Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 15/6 SC	Grundfos UPM3S Auto 15-60	Wilo Para 15/8 SC		
20	3/4"	M2 MIX3 Energy	202518-M3-P6-20	202518-M3-A6-20	202518-M3-P8-20		1	-
			Price:	€ 362,24	€ 362,24	€ 422,48		

Energy meter 3/4", connection 1", L=130 mm

Approximate data of the Energy pump unit with the energy meter installed

Model	Energy meter	Δt	Kvs of the unit (*)	Approximate power and flow of the installation	Recommended circulating pump	Residual lifting power
M2 MIX3 + G21	2,5 m ³ /h	20 K	3,1	21 kw - 900 l/h	Wilo Para 15/6 SC	5 mH ₂ O
M2 MIX3 + G21	2,5 m ³ /h	20 K	3,1	35 kw - 1500 l/h	Wilo Para 15/8 SC	5 mH ₂ O

(*) The indicated Kvs concerns the unit including the energy meter installed



MODVLVS

DN20 PUMP UNITS

M2 FIX3 Energy

MIXED PUMP UNIT WITH FIXED TEMPERATURE
THERMOSTATIC MIXING VALVE
MADE FOR THE FITTING OF AN ENERGY METER

"Energy" pump units without circulating pump, without energy meter.
Up to 22 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 2.0.

DN	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
20	3/4"	M2 FIX3 Energy	202518-(F1/F2)-20	€ 255,06	1	-

Energy meter 3/4", connection 1", L=130 mm

"Energy" pump units with synchronous circulating pump, without energy meter.
Up to 22 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 2.0.

DN	Dim.	Item	Code:	Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 15/6 SC	Grundfos UPM3S Auto 15-60	Wilo Para 15/8 SC		
20	3/4"	M2 FIX3 Energy	202518-(F1/F2)-P6-20	202518-(F1/F2)-P6-20	202518-(F1/F2)-A6-20	202518-(F1/F2)-P8-20	1	-
			Price:	€ 397,63	€ 397,64	€ 457,88		

Energy meter 3/4", connection 1", L=130 mm

Approximate data of the Energy pump unit with the energy meter installed

Model	Field of regulation	Energy meter	Δt	Kvs of the unit (*)	Approximate power and flow of the installation	Recommended circulating pump	Residual lifting power
M2 FIX3 F1 + G21	20-45°C	2,5 m³/h	8 K	1,9	9 kw - 1000 l/h	Wilo Para 15/8 SC	5 mH ₂ O
M2 FIX3 F2 + G21	45-70°C	2,5 m³/h	20 K	1,9	23 kw - 1000 l/h	Wilo Para 15/8 SC	5 mH ₂ O

(*) The indicated Kvs concerns the unit including the energy meter installed



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

DIFFERENTIAL BY-PASS VALVE

Differential by-pass valve with connections. Setting range: 0-0.5 bar. Kvs 5.0

Dimension	Code	Description	Price	s.b.	m.c.
3/4" x 1"	103901-DN20	Art. 901 - By-pass valve with connections	€ 62,23	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

FIXING BRACKET

DN20 fixing bracket

Dimension	Code	Description	Price	s.b.	m.c.
1" M x Nut	DAOA20SET	Wall fixing bracket DN20; distance 100 or 150 mm.	€ 30,30	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

COPPER PIPE ADAPTER

Set compression union, nut and olive to connect DN20 units to copper pipes

Dimension	Code	Description	Price	s.b.	m.c.
3/4" x 15 mm	115520-DN20	Adapter 3/4" male for copper pipe 15 mm	€ 8,63	1	-
3/4" x 18 mm	118520-DN20	Adapter 3/4" male for copper pipe 18 mm	€ 8,44	1	-
3/4" x 22 mm	122520-DN20	Adapter 3/4" male for copper pipe 22 mm	€ 5,61	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

CONNECTION KIT FOR ADDITIONAL COMPONENTS

"T" connection kit for additional components

Dimension	Code	Description	Price	s.b.	m.c.
3/4" x 1"	102646RM	"T" connection kit for additional components	€ 27,76	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

ACTUATORS

Actuators

Dimension	Code	Description	Price	s.b.	m.c.
-	TRM20	3-point bidirectional actuator. 2 Nm, 105 s, 230V.	€ 87,37	1	-
-	TRM50	Proportional actuator 0-10V. 2 Nm, 90 s, AC/DC 24V.	€ 119,01	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

SET NUT AND GASKET

Set nut and gasket

Dimension	Code	Description	Price	s.b.	m.c.
1"	AYHT04SET	Set 1" nut (yellow brass) and EPDM gasket	€ 2,08	1	-
3/4" x 1" Nut	103629F	Set yellow brass nut and male connection (yellow brass) + EPDM gasket	€ 4,91	1	-



MODVLVS

DN20 COMPONENTS AND ACCESSORIES

CHECK VALVE

Check valve for mixed pump units

Dimension	Code	Description	Price	s.b.	m.c.
-	CRKZ20TOT	Check valve for mixed pump units	€ 1,90	1	-



MODVLVS DN20 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 60/90W for DN20 pump units with hydraulic compensator and connection for security unit (*). Flow up to 2 m³/h.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 2 pump units	3/4" F	1"	HV60/90W-2	€ 342,36	1	-
for 3 pump units	3/4" F	1"	HV60/90W-3	€ 381,27	1	-

(*). Use the security unit SG50-MINI/C.



MODVLVS DN20 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Security unit 50 kW

Connection	Security valve		Code	Price	s.b.	m.c.
1" Nut	1/2" x 3/4"		SG50-MINI/C	€ 62,17	1	-
1" F	1/2" x 3/4"		SG50-MINI	€ 59,24	1	-



MODVLVS DN20 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 60/90 for DN20 pump units; flow up to 2 m³/h.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 2 pump units	3/4" F	1"	HV60/90-2	€ 212,95	1	-
for 3 pump units	3/4" F	1"	HV60/90-3	€ 253,42	1	-



MODVLVS

DN20 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Wall fixing bracket for HV 60/90 distribution headers.

Dimension			Code	Price	s.b.	m.c.
-			DAOA-COL	€ 38,80	1	-



MODVLVS

DN20 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

1/2" adapter with plug for equipments

Dimension			Code	Price	s.b.	m.c.
1/2"			TAP-COL-6SET	€ 10,48	1	-



MODVLVS

DN20 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Isolating ball valve for distributors. PN 6. Max. temperature 110 °C

Dimension	Item		Code	Price	s.b.	m.c.
3/4"	552		03552/M	€ 15,50	1	-



MODVLVS

MAGNETIC FILTER

Art. 652

Magnetic filter

Dimension	Kvs	Code	Description	Price	s.b.	m.c.
1" M x 130 mm	15.0	104652-15	DN20 Magnetic filter	€ 64,63	1	



MODVLVS

MAGNETIC FILTER

CONVERSION KIT FOR UNMIXED MODULES

Conversion kit for the installation of the magnetic filter in unmixed modules. It consists of magnetic filter, set nut and gasket, ball valve.

Dimension	For modules	Code	Description	Price	s.b.	m.c.
1" M x 130 mm	DN20	104652-15-SET	Conversion kit for DN20 pump units	€ 85,20	1	



MODVLVS

MAGNETIC FILTER

CONVERSION OF MIXED MODULES

To install the magnetic filter in mixed units, simply replace the straight fitting of the return.



MODVLVS

MAGNETIC FILTER

M2

UNMIXED PUMP UNIT

Unmixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 15/6 SC	Para 15/8 SC		
DN20	3/4"	M2	Code	202652	202652-P6	202652-P8	1	-
			Price:	€ 209,94	€ 352,52	€ 412,77		



MODVLVS

MAGNETIC FILTER

M2 MIX3 - MIX33

MIXED PUMP UNIT WITH 3-WAY MIXING VALVE

Mixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 15/6 SC	Para 15/8 SC		
DN20	3/4"	M2 MIX3	Code	202652-M3	202652-M3-P6	202652-M3-P8	1	-
			Price:	€ 249,87	€ 392,45	€ 452,70		
DN20	3/4"	M2 MIX33	Code	202652-M33	202652-M33-P6	202652-M33-P8	1	-
			Price:	€ 254,19	€ 396,76	€ 457,01		

Pump units with left supply (except "Energy" and "Clima" series):

Description	Code	Price	conf	imb
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS DN25 PUMP UNITS

M2 - M3 DIRECT PUMP UNIT

Pump units without circulating pump. Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 8.0.

Version	Dimension	Item	Code	Price without circulating pump	s.b.	m.c.
without by-pass	1"	M2	20355R	€ 190,57	1	-
with by-pass	1"	M3	20358R	€ 232,52	1	-

Pump units with synchronous circ. pump. Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 8.0.

Version	Dimension	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2	Code:	20355R-P6	20355R-A6	20355R-P8	1	-
			Price:	€ 370,19	€ 370,30	€ 429,87		
with by-pass	1"	M3	Code:	20358R-P6	20358R-A6	20358R-P8	1	-
			Price:	€ 412,14	€ 412,25	€ 471,82		

M2 Series WITHOUT BYPASS



M3 Series WITH OVERPRESSURE BALANCING BY-PASS (0-0.5 bar)





MODVLVS

DN25 PUMP UNITS

M2 MIX3 - M3 MIX3

MIXED PUMP UNIT WITH
3-WAY MIXING VALVE

Pump units without circulating pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
without by-pass	1"	M2 MIX3	20355R-M3	€ 266,97	1	-
with by-pass	1"	M3 MIX3	20358R-M3	€ 314,17	1	-

Pump units with synchronous circ. pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2 MIX3	Code	20355R-M3-P6	20355R-M3-A6	20355R-M3-P8	1	-
			Price:	€ 446,59	€ 446,70	€ 506,27		
with by-pass	1"	M3 MIX3	Code	20358R-M3-P6	20358R-M3-A6	20358R-M3-P8	1	-
			Price:	€ 493,78	€ 493,90	€ 553,47		



M21D



AHD20

MODVLVS

DN25 PUMP UNITS

M2 MIX3 - M3 MIX3

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator.

M21D actuator	Price increase:	€ 78,40	1	-
Ordering example: M2 MIX3 1" with M21D actuator: code 20355R-M3-(P6/A6/P8)-M21				
AHD20 - Climatic controller with actuator	Price increase:	€ 359,37	1	-
Ordering example: M2 MIX3 1" with AHD20 actuator: code 20355R-M3-(P6/A6/P8)-AHC				



MODVLVS

DN25 PUMP UNITS

M2 MIX33 - M3 MIX33

MIXED PUMP UNIT FOR LOW TEMPERATURE,
WITH 3-WAY MIXING VALVE,
WITH BUILT-IN BYPASS

Pump units without circulating pump. Up to 38 kW (Δt 15 K) with a 8 m circulating pump. Kvs: 7.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
without by-pass	1"	M2 MIX33	20355R-M33	€ 271,54	1	-
with by-pass	1"	M3 MIX33	20358R-M33	€ 318,74	1	-

Pump units with synchronous circ. pump. Up to 38 kW (Δt 15 K) with a 8 m circulating pump. Kvs: 7.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2 MIX33	Code	20355R-M33-P6	20355R-M33-A6	20355R-M33-P8	1	-
			Price:	€ 451,16	€ 451,27	€ 510,84		
with by-pass	1"	M3 MIX33	Code	20358R-M33-P6	20358R-M33-A6	20358R-M33-P8	1	-
			Price:	€ 498,35	€ 498,47	€ 558,04		



M21D



AHD20

MODVLVS

DN25 PUMP UNITS

M2 MIX33 - M3 MIX33

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator.

M21D actuator	Price increase:	€ 78,40	1	-
Ordering example: M2 MIX33 1" with M21D actuator: code 20355R-M33-(P6/A6/P8)M21				
AHD20 - Climatic controller with actuator	Price increase:	€ 359,37	1	-
Ordering example: M2 MIX33 1" with AHD20 actuator: code 20355R-M33-(P6/A6/P8)AHC				



MODVLVS

DN25 PUMP UNITS

M2 MIX4 - M3 MIX4


MIXED PUMP UNIT WITH 4-WAY MIXING VALVE

Pump units without circulating pump. Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 5.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
without by-pass	1"	M2 MIX4	20355R-M4	€ 282,42	1	-
with by-pass	1"	M3 MIX4	20358R-M4	€ 329,62	1	-

Pump units with synchronous circ. pump. Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 5.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2 MIX4	Code	20355R-M4-P6	20355R-M4-A6	20355R-M4-P8	1	-
			Price:	€ 462,03	€ 462,15	€ 521,72		
with by-pass	1"	M3 MIX4	Code	20358R-M4-P6	20358R-M4-A6	20358R-M4-P8	1	-
			Price:	€ 509,23	€ 509,35	€ 568,92		

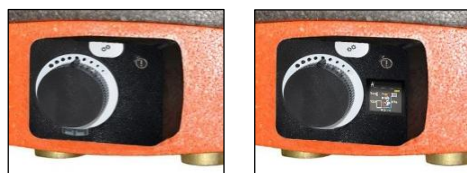

M21D

AHD20

MODVLVS

DN25 PUMP UNITS

M2 MIX4 - M3 MIX4

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator.

M21D actuator	Price increase:	€ 78,40	1	-
Ordering example: M2 MIX4 1" with M21D actuator: code 20355R-M4-(P6/A6/P8)-M21				
AHD20 - Climatic controller with actuator	Price increase:	€ 359,37	1	-
Ordering example: M2 MIX4 1" with AHD20 actuator: code 20355R-M4-(P6/A6/P8)-AHC				



MODVLVS

DN25 PUMP UNITS

M2 FIX3 - M3 FIX3

MIXED PUMP UNIT WITH FIXED TEMPERATURE THERMOSTATIC MIXING VALVE

Pump units with MultiMix thermostatic mixing valve, without circulating pump.

Version	Dim.	Item		Price without circulating pump, with thermostatic mixing valve model: F1 / F2 / F3 / F4	s.b.	m.c.
without by-pass	1"	M2 FIX3	Code	20355R-xx	1	-
			Price:	€ 330,22		
with by-pass	1"	M3 FIX3	Code	20358R-xx	1	-
			Price:	€ 377,41		

Pump units with circulating pump, with MultiMix thermostatic mixing valve model F1, F2, F3 and F4.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2 FIX3	Code	20355R-xx-P6	20355R-xx-A6	20355R-xx-P8	1	-
			Price:	€ 509,83	€ 509,95	€ 569,52		
with by-pass	1"	M3 FIX3	Code	20358R-xx-P6	20358R-xx-A6	20358R-xx-P8	1	-
			Price:	€ 557,03	€ 557,15	€ 616,72		

NOTES

"xx" shows the model of thermostatic valve: F1, F2, F3, F4 (see versions at the following page)

Versions.

Version F1: up to 4,5 kW (Δt 8 K) with 6 metres circulating pump. Kvs: 2.2.

Temperature setting range from 20°C to 45°C, Kvs 2.2

Ex. Code 20355R-F1; with Wilo Para 25/6 SC circulating pump, code: 20355R-F1-P6

Version F2: up to 11 kW (Δt 20 K) with 6 metres circulating pump. Kvs: 2.2.

Temperature setting range from 45°C to 70°C, Kvs 2.2

Ex. Code 20355R-F2; with Wilo Para 25/6 SC circulating pump, code: 20355R-F2-P6

Version F3: up to 14 kW (Δt 8 K) with 8 metres circulating pump. Kvs: 3.3.

Temperature setting range from 20°C to 45°C, Kvs 3.3

Ex. Code 20355R-F3; with Wilo Para 25/8 SC circulating pump, code: 20355R-F3-P8

Version F4: up to 35 kW (Δt 10 K) with 8 metres circulating pump. Kvs: 3.3.

Temperature setting range from 45°C to 70°C, Kvs 3.3

Ex. Code 20355R-F4; with Wilo Para 25/8 SC circulating pump, code: 20355R-F4-P8



DN25 PUMP UNITS
MODVLVS
M2 MIX3 FIX
M3 MIX3 FIX


**MIXED PUMP UNIT WITH 3-WAY MIXING VALVE WITH
 ELECTRONIC CONTROL FOR CONSTANT
 TEMPERATURE. HEATING AND COOLING**

Pump units without circulating pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
without by-pass	1"	M2 MIX3 FIX	20355R-M3F-CT	€ 502,10	1	-
with by-pass	1"	M3 MIX3 FIX	20358R-M3F-CT	€ 549,30	1	-

Pump units with synchronous circ. pump. Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
without by-pass	1"	M2 MIX3 FIX	Code	20355R-M3F-P6-CT	20355R-M3F-A6-CT	20355R-M3F-P8-CT	1	-
			Price:	€ 681,72	€ 681,83	€ 741,40		
with by-pass	1"	M3 MIX3 FIX	Code	20358R-M3F-P6-CT	20358R-M3F-A6-CT	20358R-M3F-P8-CT	1	-
			Price:	€ 728,92	€ 729,03	€ 788,60		

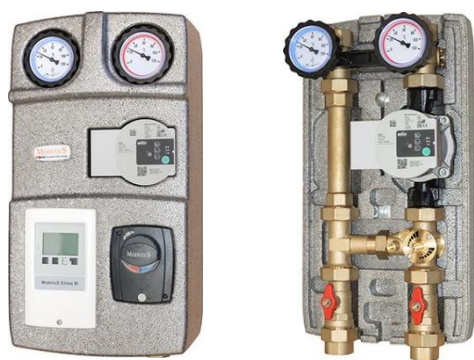

MODVLS

DN25 PUMP UNITS

CLIMA

**MIXED PUMP UNIT WITH 3-WAY MIXING VALVE,
BUILT-IN CLIMATIC CONTROLLER AND
ELECTRONIC CIRCULATING PUMP**

Pump units with by-pass built-into the mixing valve, without circulating pump.

Model	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
Clima M	1"	CLIMA M	20359R-M33-MHC	€ 830,12	1	-
Clima L	1"	CLIMA L	20359R-M33-LHC	€ 956,44	1	-

Pump units with by-pass built-into the mixing valve, with circulating pump.

Model	Dim.	Item		Price with synchronous circulating pump		s.b.	m.c.
				Wilo Para SC 25/6	Wilo Para SC 25/8		
Clima M	1"	CLIMA M	Code:	20359R-M33-MHCP6	20359R-M33-MHCP8	1	-
			Price:	€ 1.009,74	€ 1.069,42		
Clima L	1"	CLIMA L	Code:	20359R-M33-LHCP6	20359R-M33-LHCP8	1	-
			Price:	€ 1.136,06	€ 1.195,74		

Model CLIMA M: the climatic controller is provided with boiler control for request of heat source. Boiler control is 0-10V or PWM; to change the signal into potential free, please use the outside optional relay code **RELE-1W6A**. °Caleon compatible, 24 VDC. For the bus connection of two pump units the CAN-Bus cable code **CABLE-CAN2.9M** is required.

FIELD OF USE:

For power up to 35 kW (with Δt 20 K) and maximum flow 1500 l/h. Kvs Value: 6,0.

Approximate data calculated with Wilo Para SC 25/6 circulating pump (residual head: 6 m)

For power up to 20 kW (with Δt 8 K) and maximum flow 2150 l/h. Kvs Value: 6,0.

Approximate data calculated with Wilo Para SC 25/6 circulating pump (residual head: 8 m)



MODVLVS

DN25 PUMP UNITS

M2 Energy

UNMIXED PUMP UNIT MADE FOR
THE FITTING OF AN ENERGY METER

"Energy" pump units without circulating pump, without energy meter.

Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 8.0.

DN	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
20	1"	M2 Energy	203518-20	€ 209,73	1	-

"Energy" pump units with synchronous circulating pump, without energy meter.

Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 8.0.

DN	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
20	1"	M2 Energy	Code:	203518-P6-20	203518-A6-20	203518-P8-20	1	-
			Price:	€ 389,35	€ 389,46	€ 449,03		

Energy meter 3/4", connection 1", L=130 mm



MODVLVS

DN25 PUMP UNITS

M2 MIX3 Energy

MIXED PUMP UNIT WITH 3-WAY MIXING VALVE
MADE FOR THE FITTING OF AN ENERGY METER

"Energy" pump units without circulating pump, without energy meter.

Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

DN	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
20	1"	M2 MIX3 Energy	203518-M3-20	€ 286,20	1	-

"Energy" pump units with synchronous circulating pump, without energy meter.

Up to 35 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

DN	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
20	1"	M2 MIX3 Energy	Code:	203518-M3-P6-20	203518-M3-A6-20	203518-M3-P8-20	1	-
			Price:	€ 465,82	€ 465,93	€ 525,50		

Energy meter 3/4", connection 1", L=130 mm

Approximate data of the Energy pump unit with the energy meter installed

Model	Energy meter	Δt	Kvs of the unit (*)	Approximate power and flow of the installation	Recommended circulating pump	Residual lifting power
M2 + G21	2,5 m ³ /h	20 K	4,2	23 kW - 1000 l/h	Wilo Para 25/6 SC	5,5 mH ₂ O
M2 + G21	2,5 m ³ /h	20 K	4,2	43 kW - 1850 l/h	Wilo Para 25/8 SC	5,0 mH ₂ O
M2 MIX3 + G21	2,5 m ³ /h	20 K	3,8	23 kW - 1000 l/h	Wilo Para 25/6 SC	5,0 mH ₂ O
M2 MIX3 + G21	2,5 m ³ /h	20 K	3,8	39 kW - 1700 l/h	Wilo Para 25/8 SC	5,0 mH ₂ O

(*) The indicated Kvs concerns the unit including the energy meter installed



MODVLVS
SEPARATED COMPONENTS
ENERGY METER SUITABLE FOR
HEATING AND COOLING

Compact energy meter MID approved.


MID energy meter	Connection	Kvs	Code	Price	s.b.	m.c.
DN20 3/4"; Qn 2,5	1"	5.0	G21MID-2.5	€ 248,34	1	-

DN20; Qn 2,5 : MID energy meter 3/4", connection 1", L=130 mm


NOTES



10321-ISO
10323-ISO

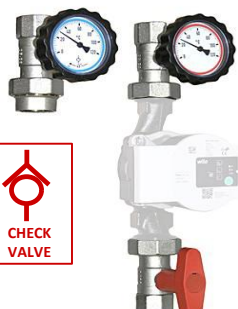

10355-ISO
10455-ISO



10358-ISO
10458-ISO

MODVLVS

DN25 KITS

CONNECTION KITS FOR
1" CIRCULATING PUMPS


Connection kit without circulating pump.

PN10 Max temperature 110°C


Dim.	Description	Code	Price without circulating pump	s.b.	m.c.
1"	Connection kit for 1" circulating pump, supply only	10321-ISO	€ 62,91	1	-
1"1/4		10323-ISO	€ 69,52	1	-
1"	Connection kit for 1" circulating pump, supply + return	10355-ISO	€ 91,49	1	-
1"1/4		10455-ISO	€ 95,36	1	-
1"	Connection kit for 1" circulating pump, with by-pass balancing valve	10358-ISO	€ 118,81	1	-
1"1/4		10458-ISO	€ 124,17	1	-



10321-ISO-...
10323-ISO-...



10355-ISO-...
10455-ISO-...

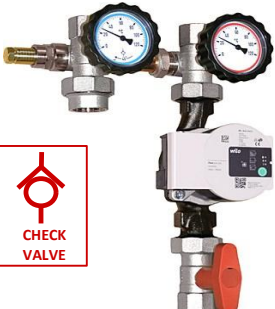

10358-ISO-...
10458-ISO-...

MODVLVS

DN25 KITS

CONNECTION KITS FOR
1" CIRCULATING PUMPS

Connection kit with synchronous circulating pump.

PN10 Max temperature 110°C (kit without circulating pump).

Dim.	Description		Price with synchronous circulating pump			s.b.	m.c.
			Para 25/6 SC	UPM3S Auto 25-60	Para 25/8 SC		
1"	Connection kit for 1" circulating pump, supply only	Code	10321-ISO-P6	10321-ISO-A6	10321-ISO-P8	1	-
		Price	€ 242,53	€ 242,64	€ 302,21		
1"1/4		Code	10323-ISO-P6	10323-ISO-A6	10323-ISO-P8	1	-
		Price	€ 249,14	€ 249,25	€ 308,82		
1"	Connection kit for 1" circulating pump, supply + return	Code	10355-ISO-P6	10355-ISO-A6	10355-ISO-P8	1	-
		Price	€ 271,10	€ 271,22	€ 330,79		
1"1/4		Code	10455-ISO-P6	10455-ISO-A6	10455-ISO-P8	1	-
		Price	€ 274,97	€ 275,09	€ 334,66		
1"	Connection kit for 1" circulating pump, with by-pass balancing valve	Code	10358-ISO-P6	10358-ISO-A6	10358-ISO-P8	1	-
		Price	€ 298,43	€ 298,54	€ 358,11		
1"1/4		Code	10458-ISO-P6	10458-ISO-A6	10458-ISO-P8	1	-
		Price	€ 303,79	€ 303,91	€ 363,48		



MODVLVS

DN25 COMPONENTS

Art. 550S ISO

BALL VALVES

Nickel plated ball valves with insulation handle, individual package.

PN 30. Max temperature 120°C. Models S/2 with NRV: PN 10. Max temperature 110°C.

Dim.	Code	Description	Price	s.b.	m.c.
1"	04550SISO	Ball valve art. 550S ISO	€ 21,92	1	12
1"1/4	05550SISO	Ball valve art. 550S ISO	€ 25,15	1	12
1"	04550S/2ISO	Ball valve art. 550S/2 ISO	€ 28,85	1	12
1"1/4	05550S/2ISO	Ball valve art. 550S/2 ISO	€ 32,26	1	12



MODVLVS

DN25 COMPONENTS

FOR KITS

Art. 550S TER

BALL VALVES

Nickel plated ball valves with in-handle thermometer, individual package.

PN 30. Max temperature 120°C. Models S/2 with NRV: PN 10. Max temperature 110°C.

Dim.	Code	Description	Price	s.b.	m.c.
1"	04550STER-(R/B)	Ball valve art. 550S TER	€ 27,13	1	12
1"1/4	05550STER-(R/B)	Ball valve art. 550S TER	€ 30,36	1	12
1"	04550S/2TER-R	Ball valve art. 550S/2 TER	€ 34,09	1	12
1"1/4	05550S/2TER-R	Ball valve art. 550S/2 TER	€ 37,48	1	12

NOTE - Coded red: **TER-R** ; coded blue: **TER-B** (excluded S/2 model)



AYHU26SET



104629 104629-05

MODVLVS

DN25 COMPONENTS

SET NUT AND GASKET

Kit nut and gasket.

Dim.	Code	Description	Price	s.b.	m.c.
1"1/2	AYHU26SET	Set 1"1/2 nikel plated nut and fibre gasket	€ 3,39	1	12
1"	104629	Set nut and F connection + fibre gasket (nikel plated)	€ 9,22	1	12
1"1/4	104629-05	Set nut and F connection + fibre gasket (nikel plated)	€ 11,11	1	12



10101



SET10101

MODVLVS

DN25 COMPONENTS AND ACCESSORIES

CHECK VALVES

Non return valves

Dimension	Code	Description	Price	s.b.	m.c.
-	10101	Check valve for pump units (ball valves) and 4-way mixing valves	€ 3,24	1	12
-	SET10101	Check valve with seat holder washer for 3-way mixing valves	€ 7,30	1	12



041050SETKVS...

MODVLVS

DN25 COMPONENTS AND ACCESSORIES

PUMP UNITS ACCESSORIES

Accessories for pump units.

Dim.	Code	Description	Price	s.b.	m.c.
-	041050SETKVS6.3	6.3 Kvs reduction kit (5 in the pump unit) for 3-way mixing valve	€ 15,03	1	12
-	041050SETKVS4	4.0 Kvs reduction kit (3,5 in the pump unit) for 3-way mixing valve	€ 16,05	1	12
-	041050SETKVS2.5	2.5 Kvs reduction kit (2,4 in the pump unit) for 3-way mixing valve	€ 16,03	1	12



115525 118525
122525 128525



AYHT26SET



104629F

MODVLVS

DN25 COMPONENTS AND ACCESSORIES

PUMP UNITS ACCESSORIES

Pump units accessories.

Dimension	Code	Description	Price	s.b.	m.c.
1" x 15mm	115525	Adapter 1" male for copper pipe 15 mm	€ 9,54	1	-
1" x 18mm	118525	Adapter 1" male for copper pipe 18 mm	€ 9,10	1	-
1" x 22mm	122525	Adapter 1" male for copper pipe 22 mm	€ 6,04	1	-
1" x 28mm	128525	Adapter 1" male for copper pipe 28 mm	€ 9,31	1	-
1"1/2	AYHT26SET	Set 1"1/2 yellow brass nut and EPDM gasket	€ 3,38	1	12
1"	104629F	Set yellow brass nut and F connection + EPDM gasket	€ 7,11	1	12
1"1/4	104629F-05	Set yellow brass nut and F connection + EPDM gasket	€ 18,35	1	12



MODVLVS

DN25 COMPONENTS AND
ACCESSORIES

PUMP UNITS ACCESSORIES

Fixing bracket.

Dimension	Code	Description	Price	s.b.	m.c.
1"1/2 M x Nut	DAOA25SET	Wall fixing bracket DN25; distance 100 or 150 mm.	€ 46,33	1	-



MODVLVS

DN25 COMPONENTS AND
ACCESSORIES

PUMP UNITS ACCESSORIES

Connection kit for additional components.

Dimension	Code	Description	Price	s.b.	m.c.
1"Mx1"F	104646RM	Connection kit for additional components	€ 25,05	1	-



MODVLVS

MAGNETIC FILTER

Art. 652

Magnetic filter

Dimension	Kvs	Code	Description	Price	s.b.	m.c.
1"1/2M x 180 mm	21.0	106652-21	DN25 Magnetic filter	€ 87,66	1	



MODVLVS

MAGNETIC FILTER

CONVERSION KIT FOR UNMIXED MODULES

Conversion kit for the installation of the magnetic filter in unmixed modules. It consists of magnetic filter, set nut and gasket, ball valve.

Dimension	For modules	Code	Description	Price	s.b.	m.c.
1"1/2M x 180 mm	DN25	106652-21-SET	Conversion kit for DN25 pump units	€ 109,68	1	



MODVLVS

MAGNETIC FILTER

CONVERSION OF MIXED MODULES

To install the magnetic filter in mixed units, simply replace the straight fitting of the return.




MODVLVS

MAGNETIC FILTER

INSULATION INSERT

For pump units purchased until July 2020 it will be necessary to order the specific insert for the magnetic filter insulation.

Dimension	For modules	Code	Description	Price	s.b.	m.c.
-	DN25	ISOL-HG	Insulation insert made for magnetic filter	€ 2,89	1	

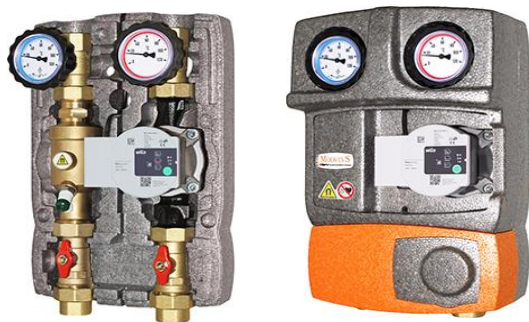

MODVLVS

MAGNETIC FILTER

M2

UNMIXED PUMP UNIT

Unmixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 25/6 SC	Para 25/8 SC		
DN25	1"	M2	Code	203652	203652-P6	203652-P8	1	-
			Price:	€ 260,86	€ 440,47	€ 500,16		



MODVLVS

MAGNETIC FILTER

M2 MIX3 - MIX33

MIXED PUMP UNIT WITH 3-WAY MIXING VALVE

Mixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 25/6 SC	Para 25/8 SC		
DN25	1"	M2 MIX3	Code	203652-M3	203652-M3-P6	203652-M3-P8	1	-
			Price:	€ 324,19	€ 503,81	€ 563,49		
DN25	1"	M2 MIX33	Code	203652-M33	203652-M33-P6	203652-M33-P8	1	-
			Price:	€ 328,76	€ 508,38	€ 568,06		



MODVLVS

DN25 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 60/125 for DN25 pump units; flow up to 2,5 m³/h.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 2 pump units	1"	1"	HV60/125-2	€ 247,38	1	-
for 3 pump units	1"	1"	HV60/125-3	€ 281,89	1	-



MODVLVS

DN25 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 70/125 for DN25 pump units; flow up to 3,5 m³/h and 70 kW.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 4 pump units	1"	1"1/4	HV70/125-4	€ 411,17	1	-
for 5 pump units	1"	1"1/4	HV70/125-5	€ 509,85	1	-
for 6 pump units	1"	1"1/4	HV70/125-6	€ 585,75	1	-



MODVLVS

DN25 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 60/125 SG for DN25 pump units; flow up to 2,5 m³/h. With connection for security unit.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 2 pump units	1"	1"	HV60/125SG-2	€ 271,37	1	-
for 3 pump units	1"	1"	HV60/125SG-3	€ 308,18	1	-



Art. 695



SG50

MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Membrane safety valve for heating installations, suitable for powers up to 50kW

CE and TUV approval. 3 bar setting pressure. Working temperature from -10 up to +120°C

Connection	Security valve	Packaging	Code	Price	s.b.	m.c.
-	1/2" x 3/4"	Individual packing	02695-03	€ 15,24	1	50
-	1/2" x 3/4"	Multiple packing	02695-03OEM	€ 10,86	50	-

Security unit 50 kW.

Connection	Security valve	Code	Price	s.b.	m.c.
1"	1/2" x 3/4"	SG50	€ 56,83	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Wall fixing bracket for HV 60 and HV 70 distribution headers.

Dimension		Code	Price	s.b.	m.c.
-		DAOA-COL	€ 38,80	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Adapter connection kit for DN32 pump units.

Dimension		Code	Price	s.b.	m.c.
1" F x 2" Nut		105629F-04	€ 22,49	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Isolating valve for distribution headers. PN 6. Maximum temperature 110°C.

Dimension	Item	Code	Price	s.b.	m.c.
1"	552	0266/M	€ 14,45	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Hydraulic compensator HW 60 series.

Flow rate	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
up to 2,5 m ³ /h	1"	1"	HW60/125-04	€ 236,73	1	-
up to 3,5 m ³ /h	1"1/4	1"1/4	HW60/125-05	€ 241,04	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

1/2" adapter with ø6 mm sensor holder pit.

Dimension			Code	Price	s.b.	m.c.
1/2"			POZ-COL-6SET	€ 13,40	1	-



MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Wall fixing brackets for HW 60 hydraulic compensators.

Distance			Code	Price	s.b.	m.c.
100 mm			DAOA100	€ 43,27	1	-
150 mm			DAOA150	€ 47,72	1	-




MODVLVS

DN25 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

3 pieces kit for distributor/hydraulic compensators connection (HW 60/125 series).

	Connection to distributor	Connection to h. comp.	Code	Price	s.b.	m.c.
-	1"	1"	04629SET	€ 12,71	1	12
-	1"1/4	1"1/4	05629SET	€ 26,48	1	12

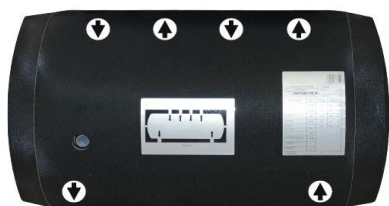

HWDN25/125-50

MODVLVS

HOT & COLD BUFFER TANK FOR HEAT PUMPS

Buffer tank for heating & cooling applications with heat pumps

Conn. to primary	Conn. to second.	Code	Description	DN	Capacity	Price	s.b.	m.c.
1"1/4 F	1" F	HWDN25/125-50	Mixing buffer tank	25	50 L	€ 547,27	1	-



MODVLVS

Logico

MULTIFUNCTIONAL COMPACT HYDRAULIC
MODULE FOR THE MANAGEMENT OF AN
UNMIXED CIRCUIT AND MIXED CIRCUIT

Compact hydraulic module for the management of one unmixed circuit and one mixed circuit.

PN 10, max temperature 95°C. Maximum total power: 35 kW

Dim.	Code	Unmixed circuit Kvs	Mixed circuit Kvs	DHW circuit Kvs	Description	Price	s.b.	m.c.
1" F	2031052-P6-LH	5.0	4.0	-	Logico pump unit	€ 1.396,22	1	-



MODVLVS

Logico

MULTIFUNCTIONAL COMPACT HYDRAULIC
MODULE FOR THE MANAGEMENT OF
AN UNMIXED CIRCUIT, A MIXED CIRCUIT
AND DHW PRODUCTION

Compact hydraulic module for the management of one unmixed circuit, one mixed circuit and DHW production.

PN 10, max temperature 95°C. Maximum total power: 35 kW

Dim.	Code	Unmixed circuit Kvs	Mixed circuit Kvs	DHW circuit Kvs	Description	Price	s.b.	m.c.
1" F	2031052ACS-P6-LH	5.0	4.0	10.0	Logico pump unit with DHW	€ 1.644,64	1	-

Pump units with left supply:

Description	Code	Price	s.b.	m.c.
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS

DN32 PUMP UNITS

M2

UNMIXED PUMP UNIT

Pump units without circulating pump. Up to 111 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 21.0.

Version	Dimension	Item	Code	Price without circulating pump	s.b.	m.c.
-	1"1/4	M2	20555R	€ 261,98	1	-

Pump units with synchronous circ. pump. Up to 111 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 21.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Para Maxo 30-08		
-	1"1/4	M2	Code:	20555R-A6	20555R-PA1-7	20555R-PA1-8	1	-
			Price:	€ 571,69	€ 526,33	€ 698,08		

The overpressure balancing function (same as the M3 pump units of DN25 range) is obtained by using self regulating circulating pumps



MODVLVS

DN32 PUMP UNITS

M2 MIX3

MIXED PUMP UNIT WITH
3-WAY MIXING VALVE

Pump units without circulating pump. Up to 93 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 13.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
-	1"1/4	M2 MIX3	20555R-M3	€ 382,31	1	-

Pump units with synchronous circ. pump. Up to 93 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 13,0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Para Maxo 30-08		
-	1"1/4	M2 MIX3	Code:	20555R-M3-A6	20555R-M3-PA1-7	20555R-M3-PA1-8	1	-
			Price:	€ 692,02	€ 646,66	€ 818,41		

The overpressure balancing function (same as the M3 pump units of DN25 range) is obtained by using self regulating circulating pumps



M21D

AHD20

MODVLVS

DN32 PUMP UNITS

M2 MIX3

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator. Minimum purchase lot: 10 pieces.

M21 actuator	Price increase:	€ 78,40	1	-
Ordering example: M2 MIX3 1"1/4 with M21 actuator: code 20555R-M3-(A6/P7/P8)-M21				
AHC40 - Climatic controller with actuator	Price increase:	€ 359,37	1	-
Ordering example: M2 MIX3 1"1/4 with AHC40: actuator, code 20555R-M3-(A6/P7/P8)-AHC				



MODVLVS

DN32 PUMP UNITS

M2 MIX33

MIXED PUMP UNIT FOR LOW TEMPERATURE,
WITH 3-WAY MIXING VALVE,
WITH BUILT-IN BYPASS

Pump units without circulating pump. Up to 76 kW (Δt 15 K) with a 8 m circulating pump. Kvs: 16.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
-	1"1/4	M2 MIX33	20555R-M33	€ 386,88	1	-

Pump units with synchronous circ. pump. Up to 76 kW (Δt 15 K) with a 8 m circulating pump. Kvs: 16.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Para Maxo 30-08		
-	1"1/4	M2 MIX33	Code:	20555R-M33-A6	20555R-M33-PA1-7	20555R-M33-PA1-8	1	-
			Price:	€ 696,59	€ 651,23	€ 822,97		

The overpressure balancing function (same as the M3 pump units of DN25 range) is obtained by using self regulating circulating pumps



M21D



AHD20

MODVLVS

DN32 PUMP UNITS

M2 MIX33

MODELS WITH BUILT-IN ACTUATOR

Models with built-in actuator. Minimum purchase lot: 10 pieces.

M21 actuator	Price increase:	€ 78,40	1	-
Ordering example: M2 MIX33 1"1/4 with actuator M21: code 20555R-M33-(A6/P7/P8)M21				
AHC40 - Climatic controller with actuator	Price increase:	€ 359,37	1	-
Ordering example: M2 MIX33 1"1/4 with actuator AHC40: code 20555R-M33-(A6/P7/P8)AHC				



MODVLVS

DN32 PUMP UNITS

M2 MIX3 FIX

MIXED PUMP UNIT WITH 3-WAY MIXING VALVE WITH
ELECTRONIC CONTROL FOR CONSTANT TEMPERATURE.
HEATING AND COOLING

Pump units without circulating pump. Up to 93 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 13.0.

Version	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
-	1"1/4	M2 MIX3 FIX	20555R-M3F-CT	€ 615,07	1	-

Pump units with synchronous circ. pump. Up to 93 kW (Δt 20 K) with a 8 m circulating pump. Kvs: 13.0.

Version	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Para Maxo 30-08		
-	1"1/4	M2 MIX3 FIX	Code:	20555R-M3F-A6-CT	20555R-M3F-P7-CT	20555R-M3F-P8-CT	1	-
			Price:	€ 924,78	€ 879,42	€ 1.051,17		

The overpressure balancing function (same as the M3 pump units of DN25 range) is obtained by using self regulating circulating pumps



MODVLVS

DN32 COMPONENTS AND ACCESSORIES

KVS REDUCTION KIT

Kvs reduction kit for 3-way mixing valves

Dimension	Code	Description	Price	s.b.	m.c.
-	051050SETKVS12.5	12.5 Kvs reduction kit (11 in the pump unit) for 3-way mixing valve	€ 15,01	1	-
-	051050SETKVS10	10.0 Kvs reduction kit (9 in the pump unit) for 3-way mixing valve	€ 15,04	1	-
-	051050SETKVS6.3	6.3 Kvs reduction kit (6 in the pump unit) for 3-way mixing valve	€ 14,89	1	-



AYHT07SET



105629F

MODVLVS

DN32 COMPONENTS AND ACCESSORIES

SET NUT AND GASKET

Set nut and gasket

Dimension	Code	Description	Price	s.b.	m.c.
2"	AYHT07SET	Set 2" nut and EPDM gasket	€ 7,56	1	-
1"1/4F x 2" Nut	105629F	Set 2" nut, EPDM gasket and 1"1/4 female union	€ 14,17	1	-
1"F x 2"Nut	105629F-04	Set 2" nut, EPDM gasket and 1" female union	€ 22,49	1	-

Art. 04670SET-DN32

Art. 0555AMMS



MODVLVS

DN32 COMPONENTS AND ACCESSORIES

KIT FOR ENERGY METERS

Connection kit for energy meter

Dimension	Code	Description	Price	s.b.	m.c.
2"	04670SET-DN32	Kit and connections for energy meter DN20 (threaded conn. 1"), 130 mm	€ 31,70	1	12



MODVLVS

DN32 COMPONENTS AND ACCESSORIES

WALL FIXING SET

DN32 Fixing bracket

Dimension	Code	Description	Price	s.b.	m.c.
2"M x 2" Nut	DAOA32SET	Wall fixing bracket DN32; distance 160 mm.	€ 65,59	1	-



0555AMMS

MODVLVS

DN32 COMPONENTS AND ACCESSORIES

BALL VALVE

Ball valve.

PN30. Max temperature 120 °C.

Dimension	Code	Description	Price	s.b.	m.c.
2"M x 2" Nut	0555AMMS	Flanged ball valve	€ 28,92	1	12

Nuts not supplied. To be ordered separately



MODVLVS

DN32 COMPONENTS AND ACCESSORIES

CHECK VALVE

Check valve for DN32 pump units

Dimension	Code	Description	Price	s.b.	m.c.
-	CRKZOV32	Non return valve for DN32 pump units	€ 4,98	1	12



MODVLVS MAGNETIC FILTER Art. 652

Magnetic filter

Dimension	Kvs	Code	Description	Price	s.b.	m.c.
2" x 180 mm	21.0	107652-21	DN32 Magnetic filter	€ 100,72	1	



MODVLVS MAGNETIC FILTER CONVERSION KIT FOR UNMIXED MODULES

Conversion kit for the installation of the magnetic filter in unmixed modules. It consists of magnetic filter, set nut and gasket, ball valve.

Dimension	For modules	Code	Description	Price	s.b.	m.c.
2" x 180 mm	DN32	107652-21-SET	Conversion kit for DN32 pump units	€ 141,63	1	



CV DN32

MODVLVS MAGNETIC FILTER CONVERSION OF MIXED MODULES

To install the magnetic filter in mixed units, simply replace the straight fitting of the return. For DN32 groups it is also necessary to purchase the check valve code CRKZOV32 which must be inserted in the special seat in magnetic filter.



MODVLVS MAGNETIC FILTER INSULATION INSERT

For pump units purchased until July 2020 it will be necessary to order the specific insert for the magnetic filter insulation.

Dimension	For modules	Code	Description	Price	s.b.	m.c.
-	DN32	ISOL-HG05	Insulation insert made for magnetic filter	€ 4,26	1	



MODVLVS

MAGNETIC FILTER

M2

UNMIXED PUMP UNIT

Unmixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 30/8 SC	Para Maxo 30-08		
DN32	1"1/4	M2	Code	205652	205652-PA1-7	205652-PA1-8	1	-
			Price:	€ 353,91	€ 618,26	€ 790,01		



MODVLVS

MAGNETIC FILTER

M2 MIX3 - MIX33

**MIXED PUMP UNIT WITH
3-WAY MIXING VALVE**

Mixed pump units with magnetic filter

Series	Dim.	Item		Pump unit price, with magnetic filter			s.b.	m.c.
				Without circulating pump	Para 30/8 SC	Para Maxo 30-08		
DN32	1"1/4	M2 MIX3	Code	205652-M3	205652-M3-P6	205652-M3-P8	1	-
			Price:	€ 439,97	€ 704,32	€ 876,07		
DN32	1"1/4	M2 MIX33	Code	205652-M33	205652-M33-P6	205652-M33-P8	1	-
			Price:	€ 444,54	€ 708,89	€ 880,64		



MODVLVS

DN32 DISTRIBUTORS

DISTRIBUTORS FOR HEATING SYSTEMS

Distribution headers HV 80/125 for DN32 pump units; flow up to 8 m³/h and 165 Kw.

N° units	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
for 2 pump units	1"1/4	2"	HV80/125-2-M8	€ 455,25	1	-
for 3 pump units	1"1/4	2"	HV80/125-3-M8	€ 577,93	1	-
for 4 pump units	1"1/4	2"	HV80/125-4-M8	€ 698,18	1	-
for 5 pump units	1"1/4	2"	HV80/125-5-M8	€ 818,30	1	-
for 6 pump units	1"1/4	2"	HV80/125-6-M8	€ 940,03	1	-



MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Wall fixing bracket for HV 80 distribution headers.

Dimension			Code	Price	s.b.	m.c.
-			DAOA-HV160-M8	€ 90,32	1	-




MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Adapter connection kit for DN25 pump units.

Dimension			Code	Price	s.b.	m.c.
1"1/4 F x 1"1/2 Nut.			104629F-05	€ 18,35	1	-

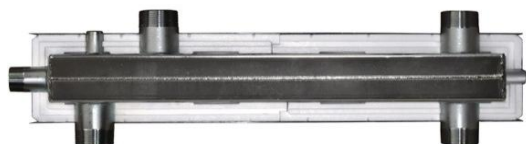

Vertical installation

MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Hydraulic compensator HW 80/570.

Flow rate	Connection to pump units	Connection to boiler	Code	Price	s.b.	m.c.
up to 8 m ³ /h	2"	2"	HW80/570-07	€ 376,79	1	-



MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Wall fixing brackets for hydraulic compensator HW 80.

Distance		Code	Price	s.b.	m.c.
160 mm		DAOA-HW160	€ 58,64	1	-



MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Connection kit 2" between hydraulic compensator and distributor.

-	Connection to distributor	Connection to h. compens.	Code	Price	s.b.	m.c.
-	2"	2"	07629SETHW80	€ 261,53	1	-



MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS

Isolating valve for distribution headers. PN 6. Maximum temperature 110°C.

Dimension	Item	Code	Price	s.b.	m.c.
1"1/4	552	05552/M	€ 21,34	1	-



MODVLVS

DN32 DISTRIBUTORS

COMPONENTS FOR DISTRIBUTORS


Security Unit 200 Kw

Connection	Security valve	Code	Price	s.b.	m.c.
2"	1"x1"1/4	SG200	€ 161,70	1	-



MODVLVS

THERMOSTATIC MIXING VALVES



Basic Series

ANTI-SCALD THERMOSTATIC MIXING VALVE

Art. 720: Female connections. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1.5 bar)	20-45°C max. 95°C	45-70°C max. 95°C	35-60°C max. 95°C	Price	s.b.	m.c.
1/2" F	1.5	±2°C	32	02720-F3-1.5	02720-F4-1.5	02720-F5-1.5	€ 42,46	1	-
3/4" F	1.8	±2°C	37	03720-F3-1.8	03720-F4-1.8	03720-F5-1.8	€ 42,46	1	-



MODVLVS

THERMOSTATIC MIXING VALVES

Art. 726: Male connections. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1.5 bar)	20-45°C max. 95°C	45-70°C max. 95°C	35-60°C max. 95°C	Price	s.b.	m.c.
3/4" M	1.5	±2°C	32	03726-F3-1.5	03726-F4-1.5	03726-F5-1.5	€ 42,46	1	-
1" M	1.8	±2°C	37	04726-F3-1.8	04726-F4-1.8	04726-F5-1.8	€ 42,46	1	-
1" M	3.4	±2°C	70	04726-F3-3.4	04726-F4-3.4	04726-F5-3.4	€ 53,42	1	-



MODVLVS

THERMOSTATIC MIXING VALVES

Art. 729: Male connections pipe union, with check valve. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1.5 bar)	20-45°C max. 95°C	45-70°C max. 95°C	35-60°C max. 95°C	Price	s.b.	m.c.
3/4" M pipe union	1.8	±2°C	37	03729-F3-1.8	03729-F4-1.8	03729-F5-1.8	€ 59,80	1	-
3/4" M pipe union	3.4	±2°C	70	03729-F3-3.4	03729-F4-3.4	03729-F5-3.4	€ 70,76	1	-

Three pcs. male union connections kit for thermostatic mixers. Two connections provided with check valve.

Connection	Description	Code	Price	s.b.	m.c.
3/4" M x 1" Nut	Max. 95°C	03729SET	€ 17,34	1	-
3/4" M x 1" Nut	Max. 120°C, specific for solar installations	03739SET	€ 23,74	1	-



Art. 730




Art. 736



Art. 739



Art. 731C



MODVLVS

THERMOSTATIC MIXING VALVES

Serie Multimix

HIGH PERFORMANCE ANTI-SCALD THERMOSTATIC MIXING VALVE

Art. 730: Female connections. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1,5 bar)	Code	Price	s.b.	m.c.
3/4" F	2.5	±1°C	51	03730-xx-2.5	€ 72,50	1	-
3/4" F	4.0	±2°C	82	03730-xx-4.0	€ 87,22	1	-

Art. 736: Male connections. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1,5 bar)	Code	Price	s.b.	m.c.
1" M	2,5	±1°C	51	04736-xx-2.5	€ 72,50	1	-
1" M	4,0	±2°C	82	04736-xx-4.0	€ 87,22	1	-
1" M	4,4	±2°C	90	04736-xx-4.4	€ 91,02	1	-
1"1/4 M	4,4	±2°C	90	05736-xx-4.4	€ 93,89	1	-

Art. 739: Male connections pipe union, with non return valve and filters. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1,5 bar)	Code	Price	s.b.	m.c.
3/4" M pipe union	2,5	±1°C	51	03739-xx-2.5	€ 96,25	1	-
3/4" M pipe union	4,0	±2°C	82	03739-xx-4.0	€ 110,97	1	-

Art. 731C: Male connection with swivel nut. PN10. "L" Asymmetric layout.

Connections	Kvs	Accur.	L/min (1,5 bar)	Code	Price	s.b.	m.c.
1" M x 1" Nut	2,5	±1°C	51	04731C-04-xx-2.5	€ 76,30	1	-
1" M x 1" Nut	4,0	±2°C	82	04731C-04-xx-4.0	€ 91,02	1	-
1" M x 1"1/2 Nut	2,5	±1°C	51	04731C-06-xx-2.5	€ 79,57	1	-
1" M x 1"1/2 Nut	4,0	±2°C	82	04731C-06-xx-4.0	€ 94,28	1	-

NOTE

"xx" in the code indicates the temperature range:

F3 20-45 °C - max. 120 °C

F4 45-70 °C - max. 120 °C

F5 35-60 °C - max. 95 °C

F7 10-30 °C - max. 65 °C



Art. 796



Art. 799



MODVLVS THERMOSTATIC MIXING VALVE

Art. 796 - Art. 799

30÷65°C

ANTI-SCALD THERMOSTATIC MIXING VALVE

Art. 796: Anti-scald thermostatic mixing valve, male flat seal. PN10, max. 90°C; "T" Symmetric layout.

Dim.	Kvs	Code	Description	Price	s.b.	m.c.
3/4"	1,5	03796	Thermostatic mixing valve Art. 796 30÷65°C	€ 58,67	1	12
1"	2,4	04796	Thermostatic mixing valve Art. 796 30÷65°C	€ 72,92	1	12
1"1/4	4,5	05796	Thermostatic mixing valve Art. 796 30÷65°C	€ 182,62	1	-
1"1/2	5,0	06796	Thermostatic mixing valve Art. 796 30÷65°C	€ 213,55	1	-

Art. 799: Anti-scald thermostatic mixing valve, male pipe union connections; PN10, max. 90°C; "T" Symmetric layout.

Dim.	Kvs	Code	Description	Price	s.b.	m.c.
1/2"	1,5	02799	Thermost. mix. valve Art. 799 30÷65°C with NRV and filters	€ 71,54	1	12
3/4"	2,4	03799	Thermost. mix. valve Art. 799 30÷65°C with NRV and filters	€ 88,03	1	12
1"	4,5	04799	Thermost. mix. valve Art. 799 30÷65°C with NRV and filters	€ 246,43	1	-
1"1/4	5,0	05799	Thermost. mix. valve Art. 799 30÷65°C with NRV and filters	€ 293,55	1	-

Maximum recommended flow for a constant
flow within ± 2 °C, with 1.5 bar pressure drop:

Kvs	Max	Kvs	Max
1.5	31 l/min	4.5	92 l/min
2.4	49 l/min	5.0	102 l/min



MODVLVS FITTINGS

MALE UNION CONNECTIONS

Three pcs. male union connections kit for thermostatic mixers. Two connections provided with check valve and filter. Max. 90°C.


Dimension	Code	Price	s.b.	m.c.
1/2" x 3/4" Nut	02799SET	€ 12,87	1	-
3/4" x 1" Nut	03799SET	€ 15,10	1	-
1" x 1"1/4 Nut	04799SET	€ 63,81	1	-
1"1/4 x 1"1/2 Nut	05799SET	€ 80,00	1	-



Art. 789R



Art. 786R



MODVLVS

THERMOSTATIC DIVERTING VALVE

780R Series

38-54°C

HIGH PERFORMANCE ADJUSTABLE
THERMOSTATIC DIVERTING VALVE

**Thermostatic diverting valve DN25. "L" Asymmetric layout
PN10, Kvs 3.5. Constant temperature max. 100°C (short time: 120°C)**

Dimension	Diverting valve temperature	Code	Price	s.b.	m.c.
3/4" M pipe union *	38-54°C	03789R-3854-3.5	€ 121,65	1	-
1" M	38-54°C	04786R-3854-3.5	€ 102,47	1	-

(*) Check valve and filter built into inlet connection.

Three pcs. male union connections kit for thermostatic diverting valve. One connection provided with check valve.

Dimension	Description	Code	Price	s.b.	m.c.
3/4" M x 1" Nut	Max. 120°C, specific for solar installations	03789RSET	€ 25,11	1	-



MODVLVS

ZONE VALVE

Art. 1610
MOTORIZABLE ZONE VALVE

F/F full port 2-way zone ball valve with quick connection for bidirectional actuator. Yellow brass finish.

PN 32. Working pressure: 16 bar. Fluid temperature: -20÷120°C

Dimension	DN	Kvs	Code	Price	s.b.	m.c.
1/2" F	15	23	021610	€ 15,60	1	
3/4" F	20	38,5	031610	€ 20,26	1	
1" F	25	76	041610	€ 28,22	1	
1" 1/4 F	32	103	051610	€ 41,70	1	



MODVLVS

ZONE VALVE

2 POINTS ACTUATORS

Bidirectional actuator with quick connection to the zone valve. Mains connection 230 V AC.

Torque	Rotation time	Code	Price	s.b.	m.c.
8 Nm	13 s	M13D	€ 85,19	1	



MODVLVS

ZONE VALVE

Art. 1610
MOTORIZED ZONE VALVE KIT

Zone valve kit with servomotor

Dimension	DN	Actuator	Code	Price	s.b.	m.c.
1/2" F	15	M13D	021610-M13D	€ 100,80	1	
3/4" F	20	M13D	031610-M13D	€ 105,46	1	
1" F	25	M13D	041610-M13D	€ 113,42	1	
1" 1/4 F	32	M13D	051610-M13D	€ 126,90	1	



Art. 1055



Art. 1056





Art. 1055
Kit with servomotor

MODVLVS

ROTATING MIXING VALVES

1055 / 1056

3-WAY MOTORIZABLE ROTATING MIXING VALVE



Art. 1055: 3-way rotating mixing valve, Female connection. PN10, max. 110°C. Working: mixing, diverting.

Dimension	DN	Kvs	Valve without actuator				Kit with actuator (*)			
			Code	Price	s.b.	m.c.	Code	Price	s.b.	m.c.
1/2" F	DN15	2.5	021055-2.5	€ 44,41	1	16	021055-2.5-NR	€ 117,29	5	-
1/2" F	DN15	4.0	021055-4.0	€ 44,41	1	16	021055-4.0-NR	€ 117,29	5	-
3/4" F	DN20	4.0	031055-4.0	€ 41,44	1	16	031055-4.0-NR	€ 114,32	5	-
3/4" F	DN20	6.3	031055-6.3	€ 41,44	1	16	031055-6.3-NR	€ 114,32	5	-
3/4" F	DN20	10.0	031055-10	€ 41,44	1	16	031055-10-NR	€ 114,32	5	-
1" F	DN25	10.0	041055-10	€ 51,38	1	16	041055-10-NR	€ 124,26	5	-
1" F	DN25	16.0	041055-16	€ 51,38	1	16	041055-16-NR	€ 124,26	5	-
1"1/4 F	DN32	16.0	051055-16	€ 60,03	1	16	051055-16-NR	€ 132,91	5	-
1"1/2 F	DN40	25.0	061055-25	€ 85,36	1	12	061055-25-NR	€ 158,23	5	-

Art. 1056: 3-way rotating mixing valve, Male connection. PN10, max. 110°C. Working: mixing, diverting.

Dimension	DN	Kvs	Valve without actuator				Kit with actuator (*)			
			Code	Price	s.b.	m.c.	Code	Price	s.b.	m.c.
3/4" M	DN15	2.5	031056-2.5	€ 42,67	1	16	031056-2.5-NR	€ 115,55	5	-
3/4" M	DN15	4.0	031056-4.0	€ 42,67	1	16	031056-4.0-NR	€ 115,55	5	-
1" M	DN20	4.0	041056-4.0	€ 41,34	1	16	041056-4.0-NR	€ 114,21	5	-
1" M	DN20	6.3	041056-6.3	€ 41,34	1	16	041056-6.3-NR	€ 114,21	5	-
1" M	DN20	10.0	041056-10	€ 41,34	1	16	041056-10-NR	€ 114,21	5	-
1"1/4 M	DN25	10.0	051056-10	€ 51,86	1	16	051056-10-NR	€ 124,74	5	-
1"1/4 M	DN25	16.0	051056-16	€ 51,86	1	16	051056-16-NR	€ 124,74	5	-
1"1/2 M	DN32	16.0	061056-16	€ 62,27	1	16	061056-16-NR	€ 135,14	5	-
2" M	DN40	25.0	071056-25	€ 84,39	1	12	071056-25-NR	€ 157,27	5	-



(*) 3 points actuator for mixing valve.

Bidirectional, reversible, operating range of 90°, 140 s
Torque 5 Nm. 230V, IP40.

MODVLVS

ROTATING MIXING VALVES

1065 / 1066

4-WAY MOTORIZABLE ROTATING MIXING VALVE





Art. 1065



Art. 1066



Kit art. 1065




Art. 1065: 4-way rotating mixing valve, Female connection. PN10, max. 110°C.

Dimension	DN	Kvs	Valve without actuator				Kit with actuator (*)			
			Code	Price	s.b.	m.c.	Code	Price	s.b.	m.c.
1/2" F	DN15	2,5	021065-2.5	€ 47,40	1	16	021065-2.5-NR	€ 120,28	5	-
1/2" F	DN15	4,0	021065-4.0	€ 47,40	1	16	021065-4.0-NR	€ 120,28	5	-
3/4" F	DN20	4,0	031065-4.0	€ 43,85	1	16	031065-4.0-NR	€ 116,73	5	-
3/4" F	DN20	6,3	031065-6.3	€ 43,85	1	16	031065-6.3-NR	€ 116,73	5	-
1" F	DN25	10,0	041065-10	€ 55,25	1	16	041065-10-NR	€ 128,13	5	-
1" F	DN25	14,0	041065-14	€ 55,25	1	16	041065-14-NR	€ 128,13	5	-
1"1/4 F	DN32	16,0	051065-16	€ 64,31	1	12	051065-16-NR	€ 137,19	5	-
1"1/2 F	DN40	25,0	061065-25	€ 95,22	1	12	061065-25-NR	€ 168,10	5	-

Art. 1066: 4-way rotating mixing valve, Male connection. PN10, max. 110°C.

Dimension	DN	Kvs	Valve without actuator				Kit with actuator (*)			
			Code	Price	s.b.	m.c.	Code	Price	s.b.	m.c.
3/4" M	DN15	2,5	031066-2.5	€ 45,03	1	16	031066-2.5-NR	€ 117,91	5	-
3/4" M	DN15	4,0	031066-4.0	€ 45,03	1	16	031066-4.0-NR	€ 117,91	5	-
1" M	DN20	4,0	041066-4.0	€ 43,56	1	16	041066-4.0-NR	€ 116,44	5	-
1" M	DN20	6,3	041066-6.3	€ 43,56	1	16	041066-6.3-NR	€ 116,44	5	-
1"1/4 M	DN25	10,0	051066-10	€ 55,84	1	16	051066-10-NR	€ 128,72	5	-
1"1/4 M	DN25	14,0	051066-14	€ 55,84	1	16	051066-14-NR	€ 128,72	5	-
1"1/2 M	DN32	16,0	061066-16	€ 67,52	1	12	061066-16-NR	€ 140,40	5	-
2" M	DN40	25,0	071066-25	€ 94,22	1	12	071066-25-NR	€ 167,09	5	-



(*) 3 points actuator for mixing valve.

Bidirectional, reversible, operating range of 90°, 140 s
Torque 5 Nm. 230V, IP40.



MODVLVS

ROTATING MIXING VALVE

Art. 1031C
3-WAY ROTATING MIXING VALVE

3-way rotating mixing valve, motorizable. "L" Asymmetric layout.

Male connection with swivel nut. PN10, Kvs 6.8. Max. temperature 110°C.

Dimension	Code	Price	s.b.	m.c.
1" M x 1" Nut	041031C-04	€ 57,51	1	-



MODVLVS

ROTATING MIXING VALVE

Art. 1036
3-WAY ROTATING MIXING VALVE

3-way rotating mixing valve, motorizable. "L" Asymmetric layout.

Male connections. PN10, Kvs 6.8. Max. temperature 110°C.

Dimension	Code	Price	s.b.	m.c.
1" M	041036	€ 51,04	1	-



MODVLVS

DISTRIBUTION BOXES KIT

BASIC SERIES

FOR DN15 CIRCULATING PUMP

Serie 686L FIX

FIXED TEMPERATURE KIT

Connection kit with fixed temperature thermostatic mixing valve. Setting range 20÷45°C. PN10. Max. 110°C (for the model without circulating pump). For power up to 8 kW (Δt 8 K) with a 6 m circulating pump. Kvs: 3.0.

Connect. to the circuit	Connect. to the manifold	Size of eccentric		Price without circulating pump	Price with synchronous circ. pump Para 15/6 SC	s.b.	m.c.
			Code:	104686LG-F3	104686LG-F3-P6	1	-
1" M	1" M swivel	-	Price:	€ 144,43	€ 288,87	1	-
			Code:	104686LG-F3-15	104686LG-F3-15P6	1	-
1" M	1" M swivel	15 mm	Price:	€ 148,86	€ 293,30	1	-
			Code:	104686LG-F3-30	104686LG-F3-30P6	1	-
1" M	1" M swivel	30 mm	Price:	€ 151,77	€ 296,21	1	-
			Code:	104686LC-F3	104686LC-F3-P6	1	-
1" M	1" Nut	-	Price:	€ 130,85	€ 275,28	1	-
			Code:	104686LC-F3-15	104686LC-F3-15P6	1	-
1" M	1" Nut	15 mm	Price:	€ 135,19	€ 279,63	1	-
			Code:	104686LC-F3-30	104686LC-F3-30P6	1	-
1" M	1" Nut	30 mm	Price:	€ 138,10	€ 282,54	1	-

Adjustment kit with fixed temperature thermostatic mixing valve. Setting range 35÷60°C. PN10. Max. 110°C (for the model without circulating pump). For power up to 8 kW (Δt 8 K) with a 6 m circulating pump. Kvs: 3.0.

Connect. to the circuit	Connect. to the manifold	Size of eccentric		Price without circulating pump	Price with synchronous circ. pump Para 15/6 SC	s.b.	m.c.
			Code:	104686LG-F5	104686LG-F5-P6	1	-
1" M	1" M swivel	-	Price:	€ 144,43	€ 288,87	1	-
			Code:	104686LG-F5-15	104686LG-F5-15P6	1	-
1" M	1" M swivel	15 mm	Price:	€ 148,86	€ 293,30	1	-
			Code:	104686LG-F5-30	104686LG-F5-30P6	1	-
1" M	1" M swivel	30 mm	Price:	€ 151,77	€ 296,21	1	-
			Code:	104686LC-F5	104686LC-F5-P6	1	-
1" M	1" Nut	-	Price:	€ 130,85	€ 275,28	1	-
			Code:	104686LC-F5-15	104686LC-F5-15P6	1	-
1" M	1" Nut	15 mm	Price:	€ 135,19	€ 279,63	1	-
			Code:	104686LC-F5-30	104686LC-F5-30P6	1	-
1" M	1" Nut	30 mm	Price:	€ 138,10	€ 282,54	1	-



MODVLVS

DISTRIBUTION BOXES KIT

687 FIX series

FIXED TEMPERATURE KIT

Adjustment kit with fixed temperature thermostatic mixing valve. Setting range 20÷45°C.

PN10. Max. 110°C (for the model without circulating pump). For power up to 15 kW (Δt 8 K) with a 8 m circulating pump. Kvs: 3.4.

Connect. to the circuit	Connect. to the manifold	Size of eccentric		Price without circ. pump	Price with synchronous circulating pump		s.b.	m.c.
					Para 15/6 SC	Para 15/8 SC		
			Code:	104687G-F3	104687G-F3-P6	104687G-F3-P8	1	-
1" M	1" M swivel	-	Price:	€ 214,45	€ 357,03	€ 417,28	1	-
			Code:	104687G-F3-15	104687G-F3-15-P6	104687G-F3-15-P8	1	-
1" M	1" M swivel	15 mm	Price:	€ 218,88	€ 361,45	€ 421,70	1	-
			Code:	104687G-F3-30	104687G-F3-30-P6	104687G-F3-30-P8	1	-
1" M	1" M swivel	30 mm	Price:	€ 221,79	€ 364,37	€ 424,62	1	-
			Code:	104687C-F3	104687C-F3-P6	104687C-F3-P8	1	-
1" M	1" Nut	-	Price:	€ 200,87	€ 343,44	€ 403,69	1	-
			Code:	104687C-F3-15	104687C-F3-15-P6	104687C-F3-15-P8	1	-
1" M	1" Nut	15 mm	Price:	€ 205,21	€ 347,79	€ 408,03	1	-
			Code:	104687C-F3-30	104687C-F3-30-P6	104687C-F3-30-P8	1	-
1" M	1" Nut	30 mm	Price:	€ 208,12	€ 350,70	€ 410,95	1	-

Adjustment kit with fixed temperature thermostatic mixing valve. Setting range 35÷60°C.

PN10. Max. 110°C (for the model without circulating pump). For power up to 15 kW (Δt 8 K) with a 8 m circulating pump. Kvs: 3.4.

Connect. to the circuit	Connect. to the manifold	Size of eccentric		Price without circ. pump	Price with synchronous circulating pump		s.b.	m.c.
					Para 15/6 SC	Para 15/8 SC		
			Code:	104687G-F5	104687G-F5-P6	104687G-F5-P8	1	-
1" M	1" M swivel	-	Price:	€ 214,45	€ 357,03	€ 417,28	1	-
			Code:	104687G-F5-15	104687G-F5-15-P6	104687G-F5-15-P8	1	-
1" M	1" M swivel	15 mm	Price:	€ 218,88	€ 361,45	€ 421,70	1	-
			Code:	104687G-F5-30	104687G-F5-30-P6	104687G-F5-30-P8	1	-
1" M	1" M swivel	30 mm	Price:	€ 221,79	€ 364,37	€ 424,62	1	-
			Code:	104687C-F5	104687C-F5-P6	104687C-F5-P8	1	-
1" M	1" Nut	-	Price:	€ 200,87	€ 343,44	€ 403,69	1	-
			Code:	104687C-F5-15	104687C-F5-15-P6	104687C-F5-15-P8	1	-
1" M	1" Nut	15 mm	Price:	€ 205,21	€ 347,79	€ 408,03	1	-
			Code:	104687C-F5-30	104687C-F5-30-P6	104687C-F5-30-P8	1	-
1" M	1" Nut	30 mm	Price:	€ 208,12	€ 350,70	€ 410,95	1	-



MODVLVS

DISTRIBUTION BOXES KIT

687 MIX series

KIT WITH 3-WAY MIXING VALVE

Adjustment kit with 3-way rotating mixing valve.

PN10. Max. 110°C (for the model without circulating pump). For power up to 17 kW (Δt 8 K) with a 8 m circulating pump. Kvs: 4.6.

Connect. to the circuit	Connect. to the manifold	Size of eccentric		Price without circ. pump	Price with synchronous circulating pump Para 15/6 SC	Price with synchronous circulating pump Para 15/8 SC	s.b.	m.c.
			Code:	104687G-M3	104687G-M3-P6	104687G-M3-P8	1	-
1" M	1" M swivel	-	Price:	€ 168,72	€ 311,29	€ 371,54	1	-
			Code:	104687G-M3-15	104687G-M3-15-P6	104687G-M3-15-P8	1	-
1" M	1" M swivel	15 mm	Price:	€ 173,15	€ 315,72	€ 375,97	1	-
			Code:	104687G-M3-30	104687G-M3-30-P6	104687G-M3-30-P8	1	-
1" M	1" M swivel	30 mm	Price:	€ 176,06	€ 318,64	€ 378,88	1	-
			Code:	104687C-M3	104687C-M3-P6	104687C-M3-P8	1	-
1" M	1" Nut	-	Price:	€ 155,13	€ 297,71	€ 357,96	1	-
			Code:	104687C-M3-15	104687C-M3-15-P6	104687C-M3-15-P8	1	-
1" M	1" Nut	15 mm	Price:	€ 159,48	€ 302,05	€ 362,30	1	-
			Code:	104687C-M3-30	104687C-M3-30-P6	104687C-M3-30-P8	1	-
1" M	1" Nut	30 mm	Price:	€ 162,39	€ 304,97	€ 365,21	1	-



103901-687



BRC-55



TRM20 / TRM50

MODVLVS

DISTRIBUTION BOXES KIT

ACCESSORIES

Differential by-pass valve. Setting range 0÷0.5 bar.

Connection	Kvs	Code	Price	s.b.	m.c.
-	5.0	103901-687	€ 60,14	1	-

Safety thermostat with fixed setting temperature 55°C. Connection 1/2" Male. NC.10(1) / 250VAC.

Connection	Temp.	Code	Price	s.b.	m.c.
1/2" M	55 °C	BRC-55	€ 22,56	1	-

Actuators

Code	Description	Price	s.b.	m.c.
TRM20	3-point bidirectional actuator. 2 Nm, 105 s, 230V.	€ 87,37	1	-
TRM50	Proportional actuator 0-10V. 2 Nm, 90 s, AC/DC 24V.	€ 119,01	1	-



MODVLVS

DISTRIBUTION BOXES KIT

ACCESSORIES

Connection to the manifold for kit for distribution boxes

Connect. to the kit	Manifold inlet connection	Size of eccentric	Code	Price	s.b.	m.c.
1" M	1" M swivel	-	SET687G	€ 16,01	1	-
1" M	1" M swivel	15 mm	SET687G-15	€ 20,44	1	-
1" M	1" M swivel	30 mm	SET687G-30	€ 23,35	1	-
1" M	1" Nut	-	SET687C	€ 9,26	1	-
1" M	1" Nut	15 mm	SET687C-15	€ 13,60	1	-
1" M	1" Nut	30 mm	SET687C-30	€ 16,51	1	-



MODVLS

REGULATORS AND FITTINGS

HCC SERIES CLIMATIC CONTROLLERS

**Climatic controller for one mixed heating circuit and request of heat source.
With 3 temperature sensors (included). 24 VDC.**

Dimension	Code	Price controller	s.b.	m.c.
-	MHCC-24	€ 388,41	1	-

**Climatic controller for one or two heating circuits and request of heat source. DHW or Solar.
With 3 temperature sensors (included). 24 VDC.**

Dimension	Code	Price controller	s.b.	m.c.
-	LHCC-24	€ 435,97	1	-



TR/P4



TT/P4



TA/55



RELE-1W6A



CABLE-CAN2.9M

MODVLS

REGULATORS AND FITTINGS

TEMPERATURE SENSORS AND CONNECTIONS

Temperature sensors and connection accessories

Code	Descrizione	Price	s.b.	m.c.
TR/P4	PVC contact sensor, 4 m length	€ 37,30	1	-
TT/P4	PVC dip sensor, 4 m length	€ 30,45	1	-
TA/55	External sensor	€ 63,49	1	-
RELE-1W6A	Outside relay 6A. Input 0-10V ; Output: potential free	€ 55,69	1	-
CABLE-CAN2.9M	CAN-Bus cable for Connect; 2.9 m length It allows to connect two or more controllers on series.	€ 19,10	1	-



M21D - M41D -
M51-05D



ACD10 - ACD20



AHD20



RCD20

MODVLVS

REGULATORS AND COMPONENTS

ACTUATORS AND ROOM THERMOSTATS

Actuators and room thermostats.

Dim.	Code	Description	Price	s.b.	m.c.
-	M21D	3-point bidirectional actuator. 5 Nm, 2 min, 230V.	€ 84,00	1	-
-	M41D	3-point bidirectional actuator. 5 Nm, 2 min, 24V AC.	€ 119,56		
-	M51-05D	Proportional actuator. 0-10V/2-10V. 5 Nm, 1 min. Mains connection: 24V AC, 24V DC	€ 150,69		
-	ACD10	Actuator with control of fluid temperature at fixed temperature. For heating and cooling. 6 Nm, 230V	€ 227,42	1	-
-	ACD20	Actuator with control of fluid temperature at fixed temperature. Control of circulating pump. For heating and cooling. 6 Nm, 2 min 230V	€ 267,69	1	-
-	AHD20	Climatic controller with actuator and outside sensor (room sensor is optional). 6 Nm, 230V	€ 359,37	1	-
-	RCD20	Remote control for AHD20	€ 154,01	1	-



MODVLVS

REGULATORS AND COMPONENTS

THERMOSTAT

Safety bimetallic thermostat.

Dim.	Code	Description	Price	s.b.	m.c.
-	BRC	Unipolar contact thermostat, setting: 20-90°C.	€ 26,39	1	-

MODVLVS

Pump units and Components for Heating Systems

MODVSOL **THERMAL SOLAR**

Price List 2026.2



bonetti rubinetterie valduggia s.r.l.

Loc. Molino Rastelli, 2 • IT-13018 Valduggia (VC) • Tel. +39 0163 48062 • Fax +39 0163 48188
<http://www.br.v.it> • e-mail: info@br.v.it • ISO 9001:2015 Cert. No. 0853/9



MODV SOL

SOLAR PUMP UNITS

S1 Solar 1

1-WAY SOLAR PUMP UNIT

Solar pump unit with synchronous circulating pump. Max. 50 kW.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	103641R-xx-PST6	103641R-xx-PST8	103641R-xx-US75		
	Price:	€ 348,38	€ 376,03	€ 373,07	1	-
1" M	Code:	104641R-xx-PST6	104641R-xx-PST8	104641R-xx-US75		
	Price:	€ 348,38	€ 376,03	€ 373,07	1	-
22 mm	Code:	122641R-xx-PST6	122641R-xx-PST8	122641R-xx-US75		
	Price:	€ 350,19	€ 377,84	€ 374,88	1	-

NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min); **38** (8-38 L/min)

Order example: S1 Solar 1, 1" Male, flowmeter 8-28 l/min and solar circulating pump Wilo Para ST 25/6 iPWM:
code **104641R-28-PST6**



MODVSOL

SOLAR PUMP UNITS

S1 Solar 10

1-WAY SOLAR PUMP UNIT WITH
BUILT-IN CONTROLLER

Solar pump unit with synchronous circulating pump and pre-wired ModvSol S controller.

Max. 50 kW. 1 relay. 2 sensors.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	103-xx-PST6-STDC	103-xx-PST8-STDC	103-xx-US75-STDC (min.10 pz)		
	Price:	€ 560,86	€ 588,51	€ 583,10	1	-
1" M	Code:	104-xx-PST6-STDC	104-xx-PST8-STDC	104-xx-US75-STDC (min.10 pz)		
	Price:	€ 560,86	€ 588,51	€ 583,10	1	-
22 mm	Code:	122-xx-PST6-STDC	122-xx-PST8-STDC	122-xx-US75-STDC (min.10 pz)		
	Price:	€ 562,84	€ 590,49	€ 585,08	1	-


Solar pump unit with synchronous circulating pump and pre-wired ModvSol S+T controller with solar function + thermostat. Max. 50 kW. 2 relays. 3 sensors.

Dimension		Price with synchronous circulating pump		s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM		
3/4" M	Code:	103-xx-PST6-S+T	103-xx-PST8-S+T		
	Price:	€ 609,89	€ 637,54	1	-
1" M	Code:	104-xx-PST6-S+T	104-xx-PST8-S+T		
	Price:	€ 609,89	€ 637,54	1	-
22 mm	Code:	122-xx-PST6-S+T	122-xx-PST8-S+T		
	Price:	€ 611,87	€ 639,52	1	-

NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min); **38** (8-38 L/min)

Order example: S1 Solar 10 - 1" Male, flowmeter 8-38 l/min and solar circulating pump Wilo Para ST 25/6 iPWM:
code **104-38-PST6-STDC**

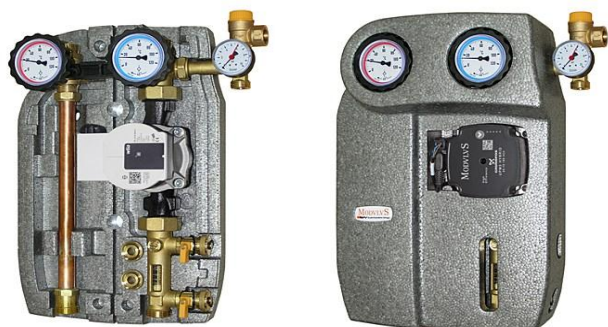

MODVSOL

SOLAR PUMP UNITS

S2 Solar 2

2-WAY SOLAR PUMP UNIT

Solar pump unit with synchronous circulating pump, without air vent. Max. 50 kW.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	303647AR-xx-PST6	303647AR-xx-PST8	303647AR-xx-US75		
	Price:	€ 433,32	€ 460,98	€ 458,02	1	-
1" M	Code:	304647AR-xx-PST6	304647AR-xx-PST8	304647AR-xx-US75		
	Price:	€ 433,32	€ 460,98	€ 458,02	1	-
22 mm	Code:	322647AR-xx-PST6	322647AR-xx-PST8	322647AR-xx-US75		
	Price:	€ 436,95	€ 464,60	€ 461,64	1	-



MODVSOL

SOLAR PUMP UNITS

S2 Solar 20

2-WAY SOLAR PUMP UNIT WITH BUILT-IN CONTROLLER


Solar pump unit without air vent, with synchronous circulating pump
and pre-wired ModvSol M electronic controller. Max. 50 kW. 2 relays. 3 sensors.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	303-xx-PST6-M3S	303-xx-PST8-M3S	303-xx-US75-M3S (min.10 pz)		
	Price:	€ 740,30	€ 767,95	€ 762,54	1	-
1" M	Code:	304-xx-PST6-M3S	304-xx-PST8-M3S	304-xx-US75-M3S (min.10 pz)		
	Price:	€ 740,30	€ 767,95	€ 762,54	1	-
22 mm	Code:	322-xx-PST6-M3S	322-xx-PST8-M3S	322-xx-US75-M3S (min.10 pz)		
	Price:	€ 744,26	€ 771,91	€ 766,50	1	-

NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min); **38** (8-38 L/min)

Order example: Solar Pump Unit without air vent, 22 mm, flowmeter 8-38 L/min, solar circulating pump Wilo Para ST 25/6 iPWM:
S2 Solar 2: code **322647AR-38-PST6** S2 Solar 20: code **322-38-PST6-M3S**

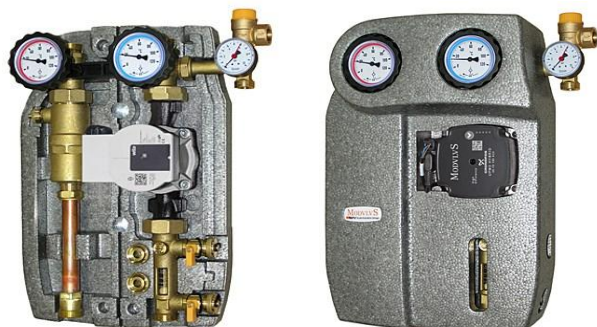

MODVSOL

SOLAR PUMP UNITS

S2 Solar 3

2-WAY SOLAR PUMP UNIT
WITH AIR VENT

Solar pump unit with synchronous circulating pump. Max. 50 kW.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	303651AR-xx-PST6	303651AR-xx-PST8	303651AR-xx-US75		
	Price:	€ 459,93	€ 487,59	€ 484,63	1	-
1" M	Code:	304651AR-xx-PST6	304651AR-xx-PST8	304651AR-xx-US75		
	Price:	€ 459,93	€ 487,59	€ 484,63	1	-
22 mm	Code:	322651AR-xx-PST6	322651AR-xx-PST8	322651AR-xx-US75		
	Price:	€ 463,55	€ 491,21	€ 488,25	1	-



MODVSOL

SOLAR PUMP UNITS

S2 Solar 30

2-WAY SOLAR PUMP UNIT
WITH AIR VENT AND BUILT-IN CONTROLLER

Solar pump unit with air vent, with synchronous circulating pump

and pre-wired ModvSol M electronic controller. Max. 50 kW. 2 relays. 3 sensors.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	303D-xx-PST6-M3S	303D-xx-PST8-M3S	303D-xx-US75-M3S (min.10 pz)		
	Price:	€ 769,61	€ 797,27	€ 791,86	1	-
1" M	Code:	304D-xx-PST6-M3S	304D-xx-PST8-M3S	304D-xx-US75-M3S (min.10 pz)		
	Price:	€ 769,61	€ 797,27	€ 791,86	1	-
22 mm	Code:	322D-xx-PST6-M3S	322D-xx-PST8-M3S	322D-xx-US75-M3S (min.10 pz)		
	Price:	€ 773,57	€ 801,23	€ 795,82	1	-

NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min); **38** (8-38 L/min)

Order example: Solar Pump Unit without air vent, 22 mm, flowmeter 8-38 L/min, solar circulating pump Wilo Para ST 25/6:
S2 Solar 3: code **322651AR-38-PST6** S2 Solar 30: code **322D-38-PST6-M3S**



MODVSOL SOLAR PUMP UNITS

S2 Solar 30L 2-WAY SOLAR PUMP UNIT WITH AIR VENT AND BUILT-IN CONTROLLER

Solar pump unit with synchronous circulating pump and pre-wired ModvSol L electronic controller.
Max. 50 kW. 3 relays. 3 sensors.

Dimension		Price with synchronous circulating pump			s.b.	m.c.
		Wilo Para ST 25/6 iPWM	Wilo Para ST 25/8 iPWM	Grundfos UPM3 Hybrid 25-70		
3/4" M	Code:	303D-xx-PST6-L3S	303D-xx-PST8-L3S	303D-xx-US75-L3S (min.10 pz)		
	Price:	€ 857,78	€ 885,44	€ 880,03	1	-
1" M	Code:	304D-xx-PST6-L3S	304D-xx-PST8-L3S	304D-xx-US75-L3S (min.10 pz)		
	Price:	€ 857,78	€ 885,44	€ 880,03	1	-
22 mm	Code:	322D-xx-PST6-L3S	322D-xx-PST8-L3S	322D-xx-US75-L3S (min.10 pz)		
	Price:	€ 861,74	€ 889,40	€ 883,99	1	-



MODVSOL SOLAR PUMP UNITS

S2 Solar 30L VFS 2-WAY SOLAR PUMP UNIT WITH AIR VENT AND BUILT-IN CONTROLLER WITH THE FUNCTION OF ENERGY METERING

Solar pump unit with synchronous circulating pump and pre-wired ModvSol L electronic controller with the function of energy metering. Max. 50 kW. 3 relays. 4 sensors.

<i>Dimension</i>	<i>Code</i>	<i>Price with synchronous circulating pump Wilo Para ST 25/8 iPWM</i>	<i>s.b.</i>	<i>m.c.</i>
3/4" M	303D-40-PST8-L4S	€ 1.012,10	1	-
1" M	304D-40-PST8-L4S	€ 1.012,10	1	-
22 mm	322D-40-PST8-L4S	€ 1.016,06	1	-

NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min); **38** (8-38 L/min)

Order example: S2 Solar 30L with air vent, 22 mm, flowmeter 8-38 L/min, high efficiency solar circulating pump
Wilo Para ST 25/8 and pre-wired electronic controller ModvSol L with 3 silicon sensors.
code **322D-38-PST8-L3S**



MODVSOL

SOLAR PUMP UNITS

S2 Solar 2

2-WAY SOLAR PUMP UNIT FOR
HIGH FLOW SYSTEMS

Solar pump unit without air vent and with synchronous circulating pump. Max 100 kW.

Dimension	Code	Price with synchronous circulating pump Wilo Para Maxo 25-180-08	s.b.	m.c.
1"1/4 M	305647-xx-PA1-8	€ 876,91	1	-
1"1/2 M	306647-xx-PA1-8	€ 890,66	1	-
1" F (*)	304F647-xx-PA1-8	€ 942,02	1	-

(*) Version 1" F: with pipe unions 1" Female

NOTES

"xx" means the flowmeter rate range: **42** (5-42 L/min); **70** (20-70 L/min)

Order example: S2 Solar 2 high flow 1" 1/4" Male, flowmeter 20-70 L/min.:

code **305647-70-PA1-8**



MODVSOL SOLAR PUMP UNITS

S2 Solar 20 Drain Back

2-WAY HIGH EFFICIENCY SOLAR PUMP UNITS FOR
DRAIN-BACK APPLICATIONS WITH BUILT-IN

Solar pump unit for drain-back applications, without air vent and non return valves.
With high efficiency synchronous circulating pump and pre-wired ModvSol M controller.
2 relays. 3 sensors.

Dimension	Code	Price with synchronous circulating pump		s.b.	m.c.
		Wilo Para ST 25/8 iPWM	Wilo Para ST 15/13 iPWM		
3/4" M	403-xx-PST(8/13)-M3S	€ 722,42	€ 776,69	1	-
1" M	404-xx-PST(8/13)-M3S	€ 722,42	€ 776,69	1	-
22 mm	422-xx-PST(8/13)-M3S	€ 726,38	€ 780,65	1	-

Solar pump unit for drain-back applications, without air vent and check valves.
With high efficiency synchronous circulating pump and pre-wired ModvSol L controller.
2 relays. 3 sensors.

Dimension	Code	Price with synchronous circulating pump		s.b.	m.c.
		Wilo Para ST 25/8 iPWM	Wilo Para ST 15/13 iPWM		
3/4" M	403-xx-PST(8/13)-L3S	€ 810,59	€ 864,87	1	-
1" M	404-xx-PST(8/13)-L3S	€ 810,59	€ 864,87	1	-
22 mm	422-xx-PST(8/13)-L3S	€ 814,55	€ 868,83	1	-


NOTES

"xx" means the flowmeter rate range: **06** (1-6 L/min); **12** (2-12 L/min); **28** (8-28 L/min)

Order example: S2 Solar 20 Drain back 3/4", with flowmeter 8-28 l/min,
solar circulating pump Wilo Para ST 15/13 iPWM, pre-wired electronic controller ModvSol L with 3 silicon sensors
code **403-28-PST13-L3S**



ModvSol M



ModvSol L

MODVSOL

DIFFERENTIAL SOLAR CONTROLLERS

ModvSol Controllers

DIFFERENTIAL TEMPERATURE CONTROLLERS

Differential temperature controller, 2 outputs, with 3 temperature sensors (included). Preset for Connect system.
With 0-10 Volts or PWM control for circulating pumps.

Dim.	Item	Code	Controller price	s.b.	m.c.
-	ModvSol M	MTDC.SET3	€ 302,49	1	-

Differential controller with 3 outputs and 4 temperature sensors (included). Preset for Connect system.
With 0-10 Volts or PWM control for circulating pumps. Energy metering function.

Dim.	Item	Code	Controller price	s.b.	m.c.
-	ModvSol L	LTDC.SET4	€ 423,32	1	-



Sensor TT/S2

Temperature sensors

Dim.	Code	Sensor price	s.b.	m.c.
-	TT/S2 - 2 m silicone sensor	€ 22,62	1	-
-	TT/T2.5 - 2.5 m teflon sensor	€ 51,62	1	-

Cables

Dim.	Code	Cable price	s.b.	m.c.
-	CAVOCIRC-A - Power supply cable for Wilo Para circulating pump	€ 5,71	1	-
-	PRESAPR71B - PWM cable for Wilo Para circulating pump	€ 6,13	1	-
-	CAVOPOT90-UPM - Power supply cable for circ. pump Grundfos UPM3	€ 9,05	1	-
-	CAVOPWM-UPM - PWM cable for circulating pump Grundfos UPM3	€ 6,88	1	-



MODVSOL

ACCESSORIES

Art. 520 Solar

BALL VALVE

Full port ball valve, yellow finish, with steel handle, PVC covered (multiple packaging).

Constant temperature 120°C (160°C for 20 sec.).

Dimension	Code	Price	s.b.	m.c.
3/4"	03520SOL	€ 13,48	1	126
1"	04520SOL	€ 18,78	1	72
1"1/4	05520SOL	€ 29,33	1	36

Attention: the art. 520 Solar is subjected to the discounts in force for the Standard Products price list.



MODVSOL

ACCESSORIES

Art. 620 ISO

BALL VALVE WITH "SOLAR" CHECK VALVE

Ball valve, yellow finish, with insulation T-handle (single box).

Constant temperature 120°C (160°C for 20 sec.).

Dimension	Code	Price	s.b.	m.c.
3/4"	03620ISO	€ 30,22	1	12
1"	04620ISO	€ 47,15	1	12



MODVSOL

ACCESSORIES

Art. 620 TER

BALL VALVE WITH "SOLAR" CHECK VALVE AND THERMOMETER

Ball valve, yellow finish, with in-handle thermometer (single box).

Constant temperature 120°C (160°C for 20 sec.).

Dimension	Code	Price	s.b.	m.c.
3/4"	03620TER-(R/B)	€ 35,95	1	12
1"	04620TER-(R/B)	€ 52,88	1	12



MODVSOL ACCESSORIES

Art. 690 SOLAR SAFETY VALVE

Membrane safety valve for solar collectors installations, for power up to 50 kW. CE and TÜV approved.
Setting pressure 6 bar. Working temperature from -20 up to +160°C.

Dimension	Package	Code	Price	s.b.	m.c.
1/2" x 3/4"	Single	02690-03	€ 15,12	1	50
1/2" x 3/4"	Multiple	02690-03OEM	€ 10,77	50	-



MODVSOL ACCESSORIES

Art. 525 FILL / DRAIN BALL VALVE

Ball valve to fill and drain thermal solar system. Constant temperature 120°C (160°C for 20 sec).

Dimension	Code	Price	s.b.	m.c.
15 mm	15525/ISO	€ 67,68	1	12
18 mm	18525/ISO	€ 65,96	1	12
22 mm	22525/ISO	€ 59,97	1	12
28 mm	28525/ISO	€ 66,48	1	12
1"	04525/ISO	€ 47,61	1	12



03654SET



AJCA43SET



CYNV04SET



AYHT26SET

MODVSOL ACCESSORIES

NUTS AND ADAPTERS

Nuts and adapters

Dim.	Code	Price	s.b.	m.c.
3/4" Nut x 15 mm	03654SET - Adapter for 15 mm copper pipe	€ 2,98	1	-
1" Nut x 22 mm	04654SET - Adapter for 22 mm copper pipe	€ 4,19	1	-
22 mm - 15 mm	AJCA43SET - Adapter 22-15 mm (set 4 pcs.)	€ 20,05	1	-
22 mm - 18 mm	AJCA44SET - Adapter 22-18 mm (set 4 pcs.)	€ 18,66	1	-
3/4"F x 1"M	CYNV04SET - Connection 3/4"F x 1"M (set 4 pcs.)	€ 14,48	1	-
1 1/2"	AYHT26SET - Nut and gasket set	€ 3,38	1	-



MODVSOL

ACCESSORIES

Deaerator

Deaerator. Max. 150°C. 3/8" upper connection for air vent valve (0177996).

Dimension	Code	Price	s.b.	m.c.
3/4" M	0377851	€ 70,51	1	12
22 mm x 22 mm	2277851	€ 60,89	1	12




MODVSOL

ACCESSORIES

AIR VENT VALVE

Air vent valve. Max. 150°C.

Dimension	Code	Price	s.b.	m.c.
3/8" M	0177996	€ 44,58	1	12

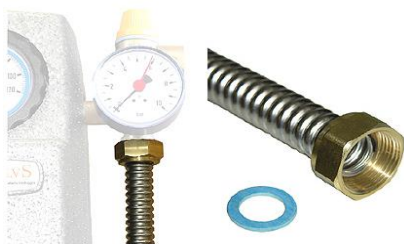

MODVSOL

ACCESSORIES

FLEXIBLE KIT FOR EXPANSION VESSEL

Flexible kit for expansion vessel.

Dimension	Code	Price	s.b.	m.c.
50 cm	FLEX0350SETB	€ 11,53	1	-
100 cm	FLEX03100SETB	€ 17,01	1	-



MODVSOL

ACCESSORIES

CONNECTOR FOR EXPANSION VESSEL

Connector with double check valve.

Dimension	Code	Price	s.b.	m.c.
3/4"	03648SET (with ring nut and gasket)	€ 21,65	1	-
3/4"	03648SET/A (only connector)	€ 19,85	1	-



MODVSOL

ACCESSORIES

FIXING BRACKET

Fixing bracket for expansion vessel.

Dimension	Code	Price	s.b.	m.c.
-	DAOASOLVE	€ 31,75	1	-



MODVSOL

ACCESSORIES

MODVSOL EXPANSION VESSEL KIT

ModvSol expansion vessel with fixing bracket. Max. 110°C.

Capacity	Code	Price	s.b.	m.c.
8 L	SETVEMODVSOL8	€ 64,58	1	-
18 L	SETVEMODVSOL18	€ 72,87	1	-
24 L	SETVEMODVSOL24	€ 82,06	1	-



MODVSOL

ACCESSORIES

Art. 1090

3-WAY ZONE VALVE

Motorized 230 V 3-way zone valve with spring return. For heating, cooling and solar thermal.

PN 10. Temperature from 5 up to 120°C; short time 150°C. Nominal opening time: 20 s. Spring closing 6 s.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" M	12,6	041090	€ 122,50	1	-



MODVSOL

THERMOSTATIC MIXING VALVES

Art. 776

30-65°C

ANTI-SCALD SOLAR THERMOSTATIC MIXING VALVE

Anti-scald thermostatic mixing valve for solar applications. 30÷65°C. Male connections.

Constant temperature 100°C (120°C for 20 sec.)

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" M	1.5	03776-1.5-S	€ 56,46	1	-
1" M	1.7	04776-1.7-S	€ 62,06	1	-
1" M	2.4	04776-2.4-S	€ 69,61	1	-



MODVSOL

THERMOSTATIC

Art. 779

30-65°C

ANTI-SCALD SOLAR THERMOSTATIC MIXING VALVE

Anti-scald thermostatic mixing valve for solar applications. 30÷65°C. Male union connections, check valves and filters.

Constant temperature 100°C (120°C for 20 sec.)

Dimension	Kvs	Code	Price	s.b.	m.c.
1/2" M	1.5	02779-1.5-S	€ 73,62	1	-
3/4" M	1.7	03779-1.7-S	€ 85,87	1	-
3/4" M	2.4	03779-2.4-S	€ 94,35	1	-



MODVSOL

THERMOSTATIC

Art. 776C

30-65°C

ANTI-SCALD SOLAR THERMOSTATIC MIXING VALVE OEM SERIES

Anti-scald thermostatic mixing valve for solar applications. 30÷65°C OEM series with cap. Male connections.

Minimum purchase lot. Constant temperature 100°C (120°C for 20 sec.)

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" M	1.5	03776C-OEM-1.5-S	€ 48,13	100*	-
1" M	1.7	04776C-OEM-1.7-S	€ 51,89	100*	-

* Supplied on blister pack (multiple packaging)



MODVSOL

THERMOSTATIC

Art. 786

48°C

**SOLAR THERMOSTATIC
DIVERTING VALVE**

Solar thermostatic diverting valve. Pre-set temperature at 48°C. Male connections.

Constant temperature 100°C (120°C for 20 sec.)

Dimension	Kvs	Code	Price	s.b.	m.c.
1" M	1.7	04786-1.7-S	€ 55,03	1	-
1" M	2.4	04786-2.4-S	€ 61,98	1	-



MODVSOL

THERMOSTATIC DIVERTING VALVES

Art. 789


48°C

**SOLAR THERMOSTATIC
DIVERTING VALVE**

Solar thermostatic diverting valve. Pre-set temperature at 48°C. Male union connections, check valve and filter.

Constant temperature 100°C (120°C for 20 sec.)

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" M	1.7	03789-1.7-S	€ 78,54	1	-
3/4" M	2.4	03789-2.4-S	€ 86,56	1	-

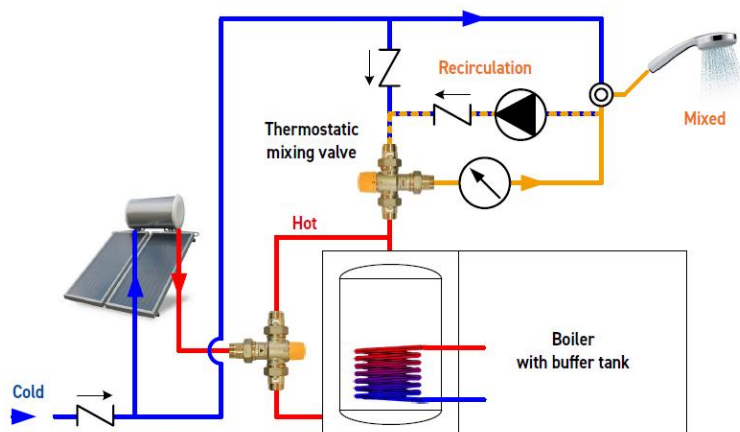

The hydraulic scheme is to be considered just an indication

Maximum recommended flow for
a constant flow within ± 2 °C, with
1.5 bar pressure drop

Kvs	Max L/min
1.5	31
1.7	35
2.4	49



MODVSOL ACCESSORIES

MALE UNION CONNECTIONS WITH SOLAR CHECK VALVE

Male union connections with solar check valve and filter. Max. 120°C.

Dimension	Code	Price	s.b.	m.c.
1/2" x 3/4" Nut	DBOI02S/SET	€ 7,04	50	-
3/4" x 1" Nut	DBOI03S/SET	€ 8,86	50	-



MODVSOL ACCESSORIES

MALE UNION CONNECTIONS

Male union connections.

Dimension	Code	Price	s.b.	m.c.
1/2" x 3/4" Nut	DBOI02/SET	€ 3,25	50	-
3/4" x 1" Nut	DBOI03/SET	€ 4,95	50	-
1" x 1 1/4" Nut	DBOI04/SET	€ 9,24	50	-



MODVSOL

SOLAR-BOILER KIT

Solar Kit 1

SOLAR-BOILER THERMOSTATIC CONNECTION KIT

Solar-boiler thermostatic connection kit. Diverting temperature 48°C.

Adjustable setting from 30°C up to 65°C. Constant temperature 100°C (120°C for 20 sec.).

Dimension	Kvs	Max. flow (3 bar)	Item	Code	Price	s.b.	m.c.
3/4" M *	1.2	35 l/min	Solar Kit 1	103685-1.2	€ 181,72	1	6
3/4" M *	1.7	49 l/min	Solar Kit 1	103685-1.7	€ 207,36	1	6

* Connection with check valve and filter.



MODVSOL

SOLAR-BOILER KIT

Solar Kit 2

SOLAR BOILER THERMOSTATIC CONNECTION KIT WITH ADJUSTABLE DIVERTING TEMPERATURE

Solar-boiler thermostatic connection kit with adjustable diverting temperature.



Diverting temperature setting from 38°C up to 54°C. Adjustable setting from 35°C up to 60°C.

Constant temperature 100°C (120°C for 20 sec.).

Dimension	Kvs	Max. flow (3 bar)	Item	Code	Price	s.b.	m.c.
3/4" M *	1.7	49 l/min	Solar Kit 2	103736-1.7	€ 259,21	1	6

* Connection with check valve and filter.

Most popular solar hydraulic schemes

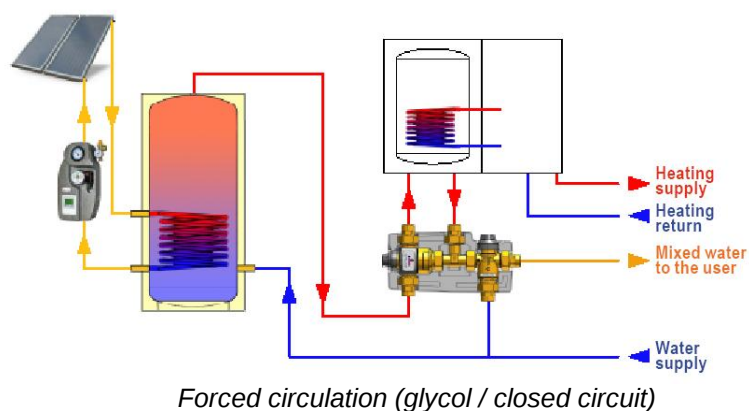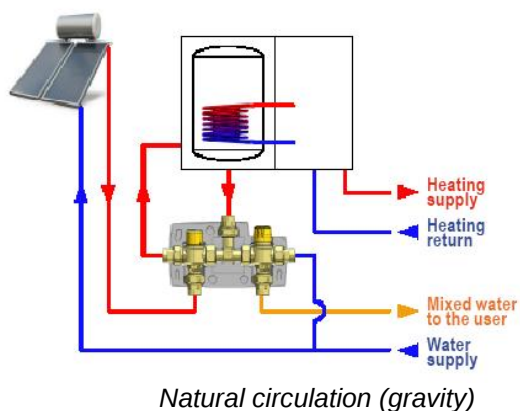



MODV SOL

SOLAR PUMP UNITS

S2 Exchange

HEAT EXCHANGE

Solar heat exchange pump unit with connections for accessories.

Dimension	Power up to	Item	Code	Price	s.b.	m.c.
1" Nut x 1"M	5 kW	S2 Exchange	304646-5KW	€ 332,76	1	-
1" Nut x 1"M	10 kW	S2 Exchange	304646-10KW	€ 393,62	1	-
1" Nut x 1"M	20 kW	S2 Exchange	304646-20KW	€ 458,02	1	-



COMPONENTS FOR HEAT EXCHANGE SOLAR PUMP UNITS

Security unit 50 kW for heating. 3/4"M connection for expansion vessel with flexible hose.

Dimension	Item	Code	Price	s.b.	m.c.
22 mm x 3/4"	Security unit 3 bar	03647D-3C-4SET	€ 45,37	1	12



COMPONENTS FOR HEAT EXCHANGE SOLAR PUMP UNIT

Filling/draining valve

Dimension	Item	Code	Price	s.b.	m.c.
22 mm x 3/4"	Filling/Draining valve	01646R-430SCASET	€ 20,67	1	12



COMPONENTS FOR HEAT EXCHANGE SOLAR PUMP UNITS

Draining Kit 3/4". 3/4"M connection for expansion vessel with flexible hose.


Dimension	Item	Code	Price	s.b.	m.c.
3/4"	Draining kit	103647P	€ 23,10	1	12



COMPONENTS FOR HEAT EXCHANGE SOLAR PUMP UNITS

Sensor holder pit ø6 mm for TT series sensors. Equipped with a M4 screw to fix the temperature sensor.

Dimension	Item	Code	Price	s.b.	m.c.
-	Sensor holder pit	POZ-646-6SET	€ 10,33	1	12

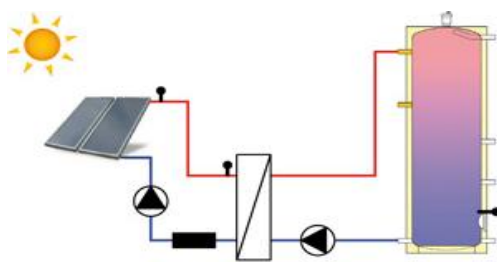

MODVSOL

SOLAR PUMP UNITS

Solo 1


PUMP UNIT TO LOAD
ONE BUFFER TANK

Pump unit with mechanical flowmeter with regulation. Synchronous circulating pumps.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031200-24-28-LT	up to 50 m ²	up to 25 kW	€ 2.276,03	1	-
Solar 1" Second. 3/4"	031200-40-38-LT	up to 70 m ²	up to 35 kW	€ 2.838,41	1	-

Pump unit with digital flowmeter VFS. Synchronous circulating pumps.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031200-24-40-LT	up to 50 m ²	up to 25 kW	€ 2.411,82	1	-
Solar 1" Second. 3/4"	031200-40-40-LT	up to 70 m ²	up to 35 kW	€ 2.983,57	1	-

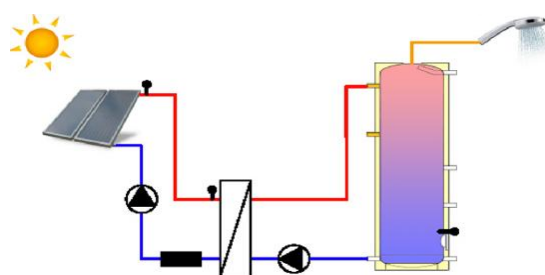

MODVSOL

SOLAR PUMP UNITS

Solo 1 ACS PUMP UNIT TO LOAD ONE DHW BUFFER TANK

Pump unit with mechanical flowmeter with regulation. Secondary asynchronous circulating pump for DHW.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031230-24-28-LT	up to 50 m ²	up to 25 kW	€ 2.389,66	1	-
Solar 1" Second. 3/4"	031230-40-38-LT	up to 70 m ²	up to 35 kW	€ 2.964,76	1	-

Pump unit with digital flowmeter VFS. Secondary asynchronous circulating pump for DHW.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031230-24-40-LT	up to 50 m ²	up to 25 kW	€ 2.525,45	1	-
Solar 1" Second. 3/4"	031230-40-40-LT	up to 70 m ²	up to 35 kW	€ 3.109,91	1	-




MODVSOL

COMPONENTS

BALL VALVES KIT

Connection valves set for Solo 1 pump units.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031200SET	2 ball valves set	€ 49,84	1	-

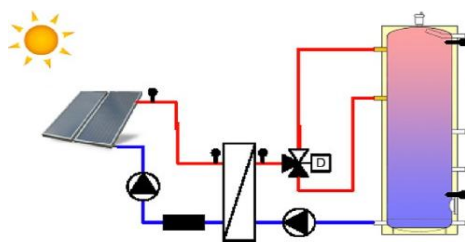

MODVSOL

SOLAR PUMP UNITS

Solo 2

PUMP UNIT FOR STRATIFIED LOADING

Pump unit with mechanical flowmeter with regulation. Synchronous circulating pumps.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031250-24-28-LT	up to 50 m ²	up to 25 kW	€ 2.472,08	1	-
Solar 1" Second. 3/4"	031250-40-38-LT	up to 70 m ²	up to 35 kW	€ 3.045,22	1	-

Pump unit with digital flowmeter VFS. Synchronous circulating pumps.

Dimension	Code	Collector surface	Power	Price	s.b.	m.c.
Solar 1" Second. 3/4"	031250-24-40-LT	up to 50 m ²	up to 25 kW	€ 2.606,11	1	-
Solar 1" Second. 3/4"	031250-40-40-LT	up to 70 m ²	up to 35 kW	€ 3.188,62	1	-



MODVSOL


COMPONENTS

BALL VALVES KIT


Connection valves set for Solo 2 pump units.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031250SET	3 ball valves set	€ 73,86	1	-


Popular hydraulic schemes *ModvSol Solo 2*

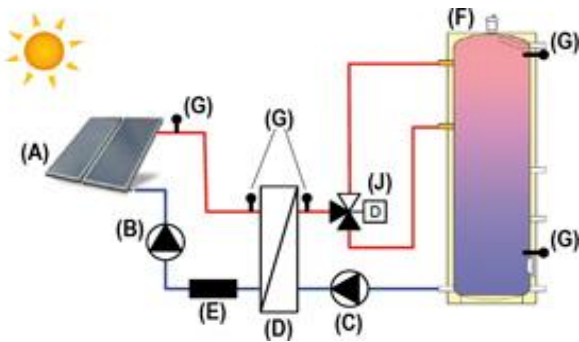

Management of one buffer tank loaded in stratification

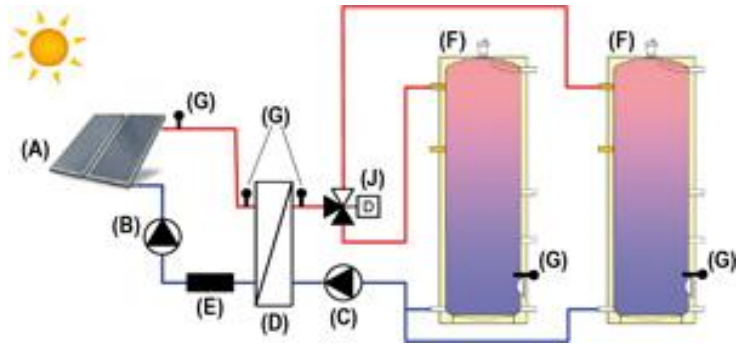

Management of two buffer tanks

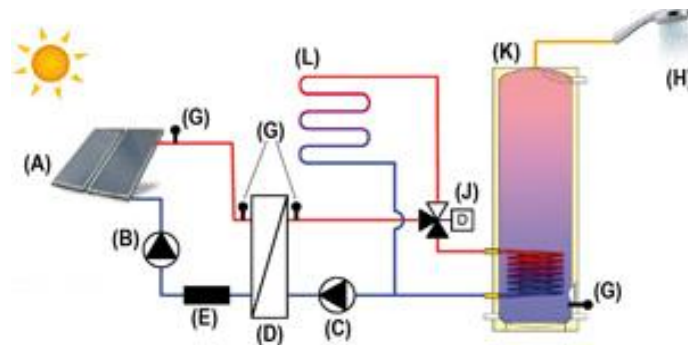

Heating and hot domestic water production

- | | |
|---|---------------------------|
| (A) - Solar collectors | (F) - Puffer |
| (B) - Circ. pump of primary circuit | (G) - Temperature sensors |
| (C) - Circ. pump of secondary circuit | (H) - Users' HDW |
| (D) - Heat exchanger | (J) - Diverting valve |
| (E) - Mechanical flowmeter
or digital VFS sensor | (K) - HDW puffer |
| | (L) - Heating circuit |

NOTE: The schemes are incomplete and to be considered just as an indication.

MODVLVS

Pump units and Components for Heating Systems

CONTROL OF DOMESTIC HOT WATER (DHW)

Price List 2026.2



bonetti rubinetterie valduggia s.r.l.

Loc. Molino Rastelli, 2 • IT-13018 Valduggia (VC) • Tel. +39 0163 48062 • Fax +39 0163 48188
<http://www.brv.it> • e-mail: info@brv.it • ISO 9001:2015 Cert. No. 0853/9



MODvFRESH

ModvFresh Basic COMPACT HEAT EXCHANGE UNIT TO DELIVER FRESH DHW

Compact heat exchange unit to deliver fresh Domestic Hot Water (DHW)

Dimension	Code	Description	Price	s.b.	m.c.
1"M x 1"F	031150-34-14	ModvFresh Basic - Up to 14 l/min (34 kW)	€ 331,12	1	-
1"M x 1"F	031150-39-16	ModvFresh Basic - Up to 16 l/min (39 kW)	€ 335,32	1	-
1"M x 1"F	031150-50-20	ModvFresh Basic - Up to 20 l/min (50 kW)	€ 368,29	1	-
1"M x 1"F	031150-60-25	ModvFresh Basic - Up to 25 l/min (60 kW)	€ 431,47	1	-



MODvFRESH COMPONENTS

35÷60°C THERMOSTATIC MIXING KIT FOR MODvFRESH BASIC

35÷60°C thermostatic mixing kit designed for ModvFresh Basic

Dimension	Code	Description	Price	s.b.	m.c.
1"M x 1" Nut	104721C-3560-1.8	Mixing kit 35÷60°C - Up to 37 l/min	€ 73,62	1	-



MODvFRESH

ModvFresh 1

**PUMP UNIT TO DELIVER FRESH DOMESTIC
HOT WATER (DHW)
WITH THERMOSTATIC CONTROL**

Pump unit with thermostatic mixing valve adjustable from 35°C up to 60°C.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031100-50-20	ModvFresh 1 - 50 kW, up to 20 l/min	€ 1.192,60	1	-
3/4"	031100-100-40	ModvFresh 1 - 100 kW, up to 40 l/min	€ 1.428,13	1	-



MODvFRESH

COMPONENTS

BALL VALVES KIT

Connection valves set for ModvFresh 1

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031000SET	4 valves set	€ 81,43	1	-



MODvFRESH

ModvFresh 1

**PUMP UNIT TO DELIVER FRESH
DOMESTIC HOT WATER (DHW)
WITH THERMOSTATIC CONTROL**

Pump unit with thermostatic mixing valve and connection valves set from 35°C up to 60°C.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031100-50-20-SE	ModvFresh 1 - 50 kW, up to 20 l/min - 4 valves set	€ 1.274,03	1	-
3/4"	031100-100-40-SE	ModvFresh 1 - 100 kW, up to 40 l/min - 4 valves set	€ 1.509,55	1	-



MODvFRESH

ModvFresh 2 T

**PUMP UNIT TO DELIVER FRESH
DOMESTIC HOT WATER (DHW) WITH
THERMOSTATIC CONTROL**

Pump unit with thermostatic control. Thermostatic mixer adjustable from 35°C up to 60°C.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031350-50-20	ModvFresh 2 T - 50 kW , up to 20 l/min	€ 793,06	1	-
3/4"	031350-70-30	ModvFresh 2 T - 70 kW , up to 30 l/min	€ 876,58	1	-



031000SET

Connection valves set

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031000SET	4 valves set	€ 81,43	1	-



MODvFRESH

ModvFresh 2 T

**PUMP UNIT TO DELIVER FRESH
DOMESTIC HOT WATER (DHW) WITH
THERMOSTATIC CONTROL**

Pump unit with thermostatic control and valves set.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031350-50-20-SE	ModvFresh 2 T - 50 kW, up to 20 l/min - 4 valves set	€ 874,49	1	-
3/4"	031350-70-30-SE	ModvFresh 2 T - 70 kW, up to 30 l/min - 4 valves set	€ 958,01	1	-



MODvFRESH

ModvFresh 2

**PUMP UNIT TO DELIVER FRESH
DOMESTIC HOT WATER (DHW)
WITH ELECTRONIC CONTROL**

Pump unit with electronic controller. Adjustable temperature setting from 30°C up to 70°C.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031300-50-20	ModvFresh 2 - 50 kW , up to 20 l/min	€ 1.044,72	1	-
3/4"	031300-70-30	ModvFresh 2 - 70 kW , up to 30 l/min	€ 1.128,14	1	-
3/4"	031300-85-35	ModvFresh 2 - 85 kW , up to 35 l/min	€ 1.293,62	1	-

Pump unit with electronic controller. Management of a recycling loop. Adjustable temperature from 30°C up to 70°C.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031310-50-20	ModvFresh 2 with recycling control - 50 kW , up to 20 l/min	€ 1.144,91	1	-
3/4"	031310-70-30	ModvFresh 2 with recycling control - 70 kW , up to 30 l/min	€ 1.232,98	1	-
3/4"	031310-85-35	ModvFresh 2 with recycling control - 85 kW , up to 35 l/min	€ 1.405,50	1	-



031000SET



031300-CIRC

COMPONENTS

BALL VALVES AND RECYCLING KIT

Connection valves set and Recycling kit for ModvFresh 2

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031000SET	4 valves set	€ 81,43	1	-
1"	031300-CIRC	Recycling kit with EcoCirc Pro 15-3/65 circ. pump, connections with check valve, ball valve	€ 216,82	1	-



ModvFresh 2

**PUMP UNIT TO DELIVER FRESH
DOMESTIC HOT WATER (DHW)**

Pump unit with electronic controller and connection valves set.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031300-50-20-SE	ModvFresh 2 - 50 kW , up to 20 l/min - 4 valves set	€ 1.126,14	1	-
3/4"	031300-70-30-SE	ModvFresh 2 - 70 kW , up to 30 l/min - 4 valves set	€ 1.209,57	1	-
3/4"	031300-85-35-SE	ModvFresh 2 - 85 kW , up to 35 l/min - 4 valves set	€ 1.510,44	1	-

Pump unit with electronic controller and connection valves kit. Management of a recycling loop.

Dim.	Code	Description	Price	s.b.	m.c.
3/4"	031310-50-20-SE	ModvFresh 2 with recycling control - 50 kW , up to 20 l/min - 4 valves set	€ 1.226,33	1	-
3/4"	031310-70-30-SE	ModvFresh 2 with recycling control - 70 kW , up to 30 l/min - 4 valves set	€ 1.314,41	1	-
3/4"	031310-85-35-SE	ModvFresh 2 with recycling control - 85 kW , up to 35 l/min - 4 valves set	€ 1.622,32	1	-



MODVFRESH ModvFresh 4

**PUMP UNIT TO DELIVER FRESH DOMESTIC HOT WATER (DHW) WITH ELECTRONIC CONTROL.
HIGH EFFICIENCY CIRCULATING PUMP.
CONTROL OF RETURN TEMPERATURE AND THERMOSTAT FUNCTION**

Pump unit with electronic controller without recycling. Adjustable temperature setting from 30°C up to 70°C.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031400-50-20	ModvFresh 4 without recycling - 50 kW, 1-20 l/min	€ 1.600,83	1	-
3/4"	031400-100-40	ModvFresh 4 without recycling - 100 kW, 2-40 l/min	€ 1.858,71	1	-
3/4"	031400-125-40	ModvFresh 4 without recycling - 125 kW, 2-40 l/min	€ 1.978,79	1	-

**Pump unit with electronic controller and recycling. Adjustable temperature setting from 30°C up to 70°C.
High Efficiency recycling circulating pump.**


Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031415-50-20	ModvFresh 4 with recycling - 50 kW, 1-20 l/min	€ 1.930,57	1	-
3/4"	031415-100-40	ModvFresh 4 with recycling - 100 kW, 2-40 l/min	€ 2.212,30	1	-
3/4"	031415-125-40	ModvFresh 4 with recycling - 125 kW, 2-40 l/min	€ 2.333,23	1	-



MODVFRESH COMPONENTS BALL VALVES KIT

Connection valves sets for ModvFresh 4

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031000SET	4 valves set for pump unit without recycling	€ 81,43	1	-
3/4"	031010SET	5 valves set for pump unit with recycling	€ 97,22	1	-



MODVFRESH ModvFresh 4 PUMP UNITS WITH CONNECTION VALVES SET

Pump unit without recycling with electronic controller and connection valves set.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031400-50-20-SE	ModvFresh 4 without recycling - 50 kW, 1-20 l/min - 4 valves set	€ 1.682,26	1	-
3/4"	031400-100-40-SE	ModvFresh 4 without recycling - 100 kW, 2-40 l/min - 4 valves set	€ 1.940,13	1	-
3/4"	031400-125-40-SE	ModvFresh 4 without recycling - 125 kW, 2-40 l/min - 4 valves set	€ 2.060,21	1	-

Pump unit with recycling, electronic controller and connection valves set. H.E. recycling circulating pump.

Dimension	Code	Description	Price	s.b.	m.c.
3/4"	031415-50-20-SE	ModvFresh 4 with recycling - 50 kW, 1-20 l/min - 5 valves set	€ 2.027,79	1	-
3/4"	031415-100-40-SE	ModvFresh 4 with recycling - 100 kW, 2-40 l/min - 5 valves set	€ 2.309,52	1	-
3/4"	031415-125-40-SE	ModvFresh 4 with recycling - 125 kW, 2-40 l/min - 5 valves set	€ 2.430,45	1	-




MODvFRESH

ModvFresh

COMPONENTS

Flow regulator

Dimension	Code	Description	Price	s.b.	m.c.
3/4" x 1"	DBOJ031000-38/S	Flow regulator fitting 38 L/min for HDW output	€ 7,80	1	-

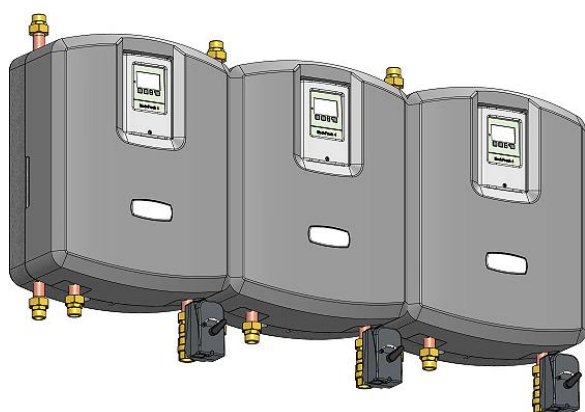

MODvFRESH

ModvFresh Kascata

**SYSTEM TO CONNECT IN CASCADE
SEVERAL DHW MODULES MODvFRESH 4
FOR INSTALLATIONS REQUIRING HIGH
POWER AND FLOW RATE OR WITH
MEDIUM-TEMPERATURE HEAT SOURCES
(HEAT PUMPS)**

Complete Kascata systems, with and without recirculation line

Kascata system - Without recirculation line							
No. Modules	2	3	4	5	6		
Code	MFK-200	MFK-300	MFK-400	MFK-500	MFK-600		
Price	€ 4.315,88	€ 6.476,97	€ 8.638,06	€ 10.831,05	€ 12.992,14		
Kascata system - With recirculation line							
No. Modules	2	3	4	5	6		
Code	MFK-R-200	MFK-R-300	MFK-R-400	MFK-R-500	MFK-R-600		
Price	€ 4.669,47	€ 6.830,56	€ 8.991,65	€ 11.184,64	€ 13.345,73		



103729-(2.5/4.0)



103729-(2.5/4.0)-(R/RU)

MODVLVS

DomvS Circ 1

DOMESTIC HOT WATER (DHW)
RECIRCULATION KIT FOR STORAGE
TANKS WITH COILS

Recirculation kit without circulating pump.

PN10, max. 95°C; Kvs 2.5, accuracy $\pm 1^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price without circulating pump	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-2.5	€ 156,11	1	-

Recirculation kit with high efficiency circulating pump equipped with temperature sensor.

PN10, max. 95°C; Kvs 2.5, accuracy $\pm 1^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-R	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-2.5-R	€ 319,65	1	-

Recirculation kit with high efficiency circulating pump equipped with temperature sensor and timer.

PN10, max. 95°C; Kvs 2.5, accuracy $\pm 1^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-RU	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-2.5-RU	€ 345,21	1	-

Recirculation kit without circulating pump.

PN10, max. 95°C; Kvs 4.0, accuracy $\pm 2^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price without circulating pump	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-4.0	€ 167,23	1	-

Recirculation kit with high efficiency circulating pump equipped with temperature sensor.

PN10, max. 95°C; Kvs 4.0, accuracy $\pm 2^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-R	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-4.0-R	€ 330,77	1	-

Recirculation kit with high efficiency circulating pump equipped with temperature sensor and timer.

PN10, max. 95°C; Kvs 4.0, accuracy $\pm 2^\circ\text{C}$.

Dimension	Connection to recirculation	Connection to storage	Temperature setting range	Code	Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-RU	s.b.	m.c.
3/4"	1/2"	1"	35-60°C	103729-4.0-RU	€ 356,33	1	-



MODVLVS

DomvS Circ 2 DOMESTIC HOT WATER (DHW) RECIRCULATION KIT FOR STORAGE TANKS

Recirculation kit with high efficiency circulating pump equipped with temperature sensor.

PN10, max. 95°C; Kvs 4.0, accuracy $\pm 2^\circ\text{C}$.

<i>Dimension</i>	<i>Temperature setting range</i>	<i>Code</i>	<i>Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-R</i>	<i>s.b.</i>	<i>m.c.</i>
3/4"	35-60°C	203726-4.0-R	€ 623,57	1	-

Recirculation kit with high efficiency circulating pump equipped with temperature sensor and timer.


PN10, max. 95°C; Kvs 4.0, accuracy $\pm 2^\circ\text{C}$.

<i>Dimension</i>	<i>Temperature setting range</i>	<i>Code</i>	<i>Price with synchronous circulating pump Lowara Ecocirc Pro 15-1/65-RU</i>	<i>s.b.</i>	<i>m.c.</i>
3/4"	35-60°C	203726-4.0-RU	€ 650,05	1	-

MODVLVS

Pump units and Components for Heating Systems

BIOMASS *Price List 2026.2*

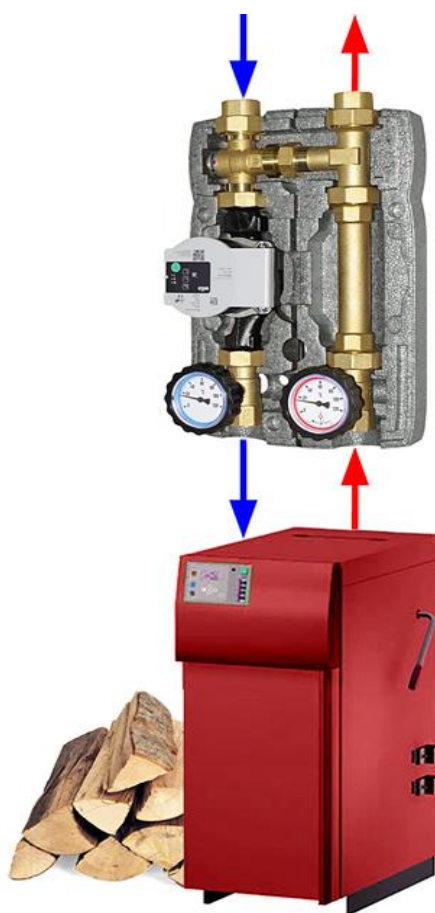

bonetti rubinetterie valduggia s.r.l.

Loc. Molino Rastelli, 2 • IT-13018 Valduggia (VC) • Tel. +39 0163 48062 • Fax +39 0163 48188
<http://www.br.v.it> • e-mail: info@br.v.it • ISO 9001:2015 Cert. No. 0853/9

Pump units with left supply

Description	Code	Price	s.b.	m.c.
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS
DN20 SOLID FUEL

M2 FIX3 CS
2-WAY PUMP UNIT WITH
RECIRCULATION THERMIC VALVE
FOR SOLID FUEL BOILERS

Anti-condensing pump unit with fixed temperature thermic valve without circulating pump.

Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs 2.8.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
28 kW	3/4"	M2 FIX3 CS	20255R-F(3/4/5)CS	€ 248,73	1	-

Anti-condensing pump unit with fixed temperature thermic valve and synchronous circulating pump.

Up to 28 kW (Δt 20 K) with a 6 m circulating pump. Kvs 2.8.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 15/6 SC	Grundfos UPM3 S 15-60	Wilo Para 15/8 SC		
28 kW	3/4"	M2 FIX3 CS	Code:	20255R-F(3/4/5)CS-P6	20255R-F(3/4/5)CS-A6	20255R-F(3/4/5)CS-P8	1	-
			Price:	€ 391,30	€ 391,31	€ 451,55		

Versions

F3CS model: Start opening temperature 60 °C (standard) - Ex. code **20255R-F3CS**; with Para 15/6 SC circ. pump, code: **20255R-F3CS-P6**
F4CS model: Start opening temperature 45 °C - Ex. code **20255R-F4CS**; with Grundfos UPM3S Auto 15-60 circ. pump, code: **20255R-F4CS-A6**
F5CS model: Start opening temperature 55 °C - Ex. code **20255R-F5CS**; with Para 15/6 SC circ. pump, code: **20255R-F5CS-P6**

Pump units with left supply

Description	Code	Price	s.b.	m.c.
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS
DN25 SOLID FUEL

M2 FIX3 CS
2-WAY PUMP UNIT WITH
RECIRCULATION THERMIC VALVE
FOR SOLID FUEL BOILERS

Anti-condensing pump unit with fixed temperature thermic valve without circulating pump.

Up to 32 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 3.0.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
32 kW	1"	M2 FIX3 CS	20355R-F(3/4/5)CS	€ 313,82	1	-

Anti-condensing pump unit with fixed temperature thermic valve with synchronous circulating pump.

Up to 32 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 3.0.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 25/6 SC	Grundfos UPM3S Auto 25-60	Wilo Para 25/8 SC		
32 kW	1"	M2 FIX3 CS	Code:	20355R-F(3/4/5)CS-P6	20355R-F(3/4/5)CS-A6	20355R-F(3/4/5)CS-P8	1	-
			Price:	€ 493,43	€ 493,55	€ 553,12		

Versions

F3CS model: Start opening temperature 60 °C (standard) - Ex. code **20355R-F3CS**; with Wilo Para 25/6 SC circ. pump, code: **20355R-F3CS-P6**

F4CS model: Start opening temperature 45 °C - Ex. code **20355R-F4CS**; with Grundfos UPM3S Auto 25-60 circ. pump, code: **20355R-F4CS-A6**

F5CS model: Start opening temperature 55 °C - Ex. code **20355R-F5CS**; with Wilo Para 25/6 SC circ. pump, code: **20355R-F5CS-P6**



MODVLVS

DN25 SOLID FUEL

M2 MIX3 CS

2-WAY PUMP UNIT FOR SOLID FUEL BOILERS WITH
ELECTRONIC SERVOMOTOR FOR THE CONTROL OF
THE RETURN TEMPERATURE

Anti-condensing pump units with mixing valve and electronic control, setting range from 5 to 95°C.
Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
50 kW	1"	M2 MIX3 CS	20355R-M3C-CT	€ 479,23	1	-

Anti-condensing pump units with mixing valve and electronic control, setting range from 5 to 95°C.
Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 25/6 SC	Grundfos UPM3S Auto 25-60	Wilo Para 25/8 SC		
50 kW	1"	M2 MIX3 CS	Code:	20355R-M3C-P6-CT	20355R-M3C-A6-CT	20355R-M3C-P8-CT	1	-
			Price:	€ 658,85	€ 658,96	€ 718,53		



MODVLVS

DN25 SOLID FUEL

M2 MIX3 CS

2-WAY PUMP UNIT FOR SOLID FUEL BOILERS WITH ACTUATOR
FOR THE CONTROL OF
THE RETURN TEMPERATURE

Anti-condensing pump units with motorized mixing valve for the control of the temperature.
Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.
Version with 3 point actuator: an electronic external controller is required.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
50 kW	1"	M2 MIX3 CS	20355R-M3C-M21	€ 345,36	1	-

Anti-condensing pump units with motorized mixing valve for the control of the temperature.
Up to 50 kW (Δt 20 K) with a 6 m circulating pump. Kvs: 6.0.
Version with 3 point actuator: an electronic external controller is required.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Wilo Para 25/6 SC	Grundfos UPM3S Auto 25-60	Wilo Para 25/8 SC		
50 kW	1"	M2 MIX3 CS	Code:	20355R-M3C-P6M21	20355R-M3C-A6M21	20355R-M3C-P8M21	1	-
			Price:	€ 524,98	€ 525,10	€ 584,67		



MODVLVS

DN25 HEAT EXCHANGE

M2 Exchange

HEAT EXCHANGE PUMP UNIT

Heat exchange pump unit with fittings. 50 kW Security valve.

Dimension	Power up to	Item	Code	Price	s.b.	m.c.
1" M	12 kW	M2 Exchange	203646-12KW	€ 356,72	1	-
1" M	16 kW	M2 Exchange	203646-16KW	€ 374,75	1	-
1" M	20 kW	M2 Exchange	203646-20KW	€ 430,36	1	-
1" M	30 kW	M2 Exchange	203646-30KW	€ 494,76	1	-

Pump units with left supply

Description	Code	Price	s.b.	m.c.
Price increase for the change of supply from right to left side, for each pump unit:	-MODVLVS-SX	€ 11,00	-	-



MODVLVS
DN32 SOLID FUEL

M2 FIX3 CS
2-WAY PUMP UNIT WITH
RECIRCULATION THERMIC VALVE
FOR SOLID FUEL BOILERS

Anti-condensing pump unit with fixed temperature thermic valve without circulating pump.

Up to 93 kW (Δt 20 K) with an 8 m circulating pump. Kvs: 7.0.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
93 kW	1"1/4	M2 FIX3 CS	20555R-F(3/4/5)CS	€ 436,35	1	-

Anti-condensing pump unit with fixed temperature thermic valve with synchronous circulating pump.

Up to 93 kW (Δt 20 K) with an 8 m circulating pump. Kvs: 7.0.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Stratos PARA 30/1-8		
93 kW	1"1/4	M2 FIX3 CS	Code:	20555R-F(3/4/5)CS-A6	20555R-F(3/4/5)CS-P7	20555R-F(3/4/5)CS-P8	1	-
			Price:	€ 746,06	€ 700,70	€ 872,45		

Varianti

F3CS model: Start opening temperature 60 °C (standard) - Ex. code **20555R-F3CS**; with Wilo Stratos Para 30/1-7 circ. pump, code: **20555R-F3CS-P7**
F4CS model: Start opening temperature 45 °C - Ex. code **20555R-F4CS**; with Grundfos Alpha 1 G0 32-60 circ. pump, code: **20555R-F4CS-A6**
F5CS model: Start opening temperature 55 °C - Ex. code **20555R-F5CS**; with Wilo Stratos Para 30/1-8 circ. pump, code: **20555R-F5CS-P8**



MODVLVS

DN32 SOLID FUEL

M2 MIX3 CS

2-WAY PUMP UNIT FOR SOLID FUEL BOILERS WITH
ELECTRONIC ACTUATOR FOR THE CONTROL OF THE
RETURN TEMPERATURE

Pump unit with mixing valve and electronic control of temperature, adjustable from 5 up to 95°C.

Without circulating pump. Up to 111 kW (Δt 20 K) with an 8 m circulating pump. Kvs 13.0.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
111 kW	1"1/4	M2 MIX3 CS	20555R-M3C-CT	€ 594,57	1	-

Pump unit with mixing valve and electronic control of temperature, adjustable from 5 up to 95°C.

With synchronous circulating pump. Up to 111 kW (Δt 20 K) with a 8 m circulating pump. Kvs 13.0.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Stratos PARA 30/1-8		
111 kW	1"1/4	M2 MIX3 CS	Code:	20555R-M3C-A6-CT	20555R-M3C-P7-CT	20555R-M3C-P8-CT	1	-
			Price:	€ 904,28	€ 858,92	€ 1.030,67		



MODVLVS

DN32 SOLID FUEL

M2 MIX3 CS

2-WAY PUMP UNIT FOR SOLID FUEL BOILERS WITH
ACTUATOR FOR THE CONTROL OF THE RETURN
TEMPERATURE

Pump unit with motorized mixing valve for the control of temperature.

Without circulating pump. Up to 111 kW (Δt 20 K) with an 8 m circulating pump. Kvs 13.0.

Version with 3 point actuator: an electronic external controller is required.

Power	Dim.	Item	Code	Price without circulating pump	s.b.	m.c.
111 kW	1"1/4	M2 MIX3 CS	20555R-M3C-M21	€ 460,71	1	-

Pump unit with motorized mixing valve for the control of temperature.

With synchronous circulating pump. Up to 111 kW (Δt 20 K) with an 8 m circulating pump. Kvs 13.0.

Version with 3 point actuator: an electronic external controller is required.

Power	Dim.	Item		Price with synchronous circulating pump			s.b.	m.c.
				Grundfos Alpha 1 G0 32-60	Wilo Para 30/8 SC	Wilo Stratos PARA 30/1-8		
111 kW	1"1/4	M2 MIX3 CS	Code:	20555R-M3C-A6M21	20555R-M3C-P7M21	20555R-M3C-P8M21	1	-
			Price:	€ 770,41	€ 725,06	€ 896,80		



Art. 746



Art. 749

MODVLVS

DN20 SOLID FUEL

Serie 740

ANTI-CONDENSING VALVES WITH
THERMOSTATIC CONTROL



Art. 740



Art. 741C-04



Art. 741C-06

Anti-condensing valve with thermostatic control. 1" Male connection. Up to 32 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" M	3.5	04746-xx	€ 55,22	1	-

Anti-condensing valve with thermostatic control. 3/4" Male pipe union. Up to 32 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" M	3.5	03749-xx	€ 71,21	1	-

Anti-condensing valve with thermostatic control. 3/4" Female connection. Up to 32 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" F	3.5	03740-xx	€ 55,22	1	-

Anti-condensing valve with thermostatic control. 1" Swivel nut x 1" Male. Up to 32 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" Nut x 1" M	3.5	04741C-04-xx	€ 59,02	1	-

Anti-condensing valve with thermostatic control. 1 1/2 Swivel nut x 1" Male. Up to 32 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1 1/2 Nut x 1" M	3.5	04741C-06-xx	€ 62,28	1	-

NOTES

"xx" shows the setting temperature of the valve:

45 start opening at 45°C

70 start opening at 70°C

55 start opening at 55°C

80 start opening at 80°C (available on demand, min. 200 pcs.)

60 start opening at 60°C



Art. 746S



Art. 749S

MODVLVS

DN20 SOLID FUEL

Serie 740S

ANTI-CONDENSING VALVES WITH
THERMOSTATIC CONTROL

Anti-condensing valve with thermostatic control. 1" Male connection. Up to 60 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" M	6.5	04746S-xx	€ 50,18	1	-

Anti-condensing valve with thermostatic control. 3/4" Male pipe union. Up to 60 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
3/4" M	6.5	03749S-xx	€ 66,16	1	-

NOTES

"xx" shows the setting temperature of the valve:

45 start opening at 45°C

55 start opening at 55°C

60 start opening at 60°C

65 start opening at 65°C

72 start opening at 72°C

77 start opening at 77°C



Art. 746



Art. 749

MODVLVS

DN25 SOLID FUEL

Serie 740

ANTI-CONDENSING VALVES WITH
THERMOSTATIC CONTROL



Art. 740



Art. 741C-05



Art. 741C-07

Anti-condensing valve with thermostatic control. 1"1/4 Male connection. Up to 65 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1"1/4 M	7.2	05746-xx	€ 76,67	1	-

Anti-condensing valve with thermostatic control. 1" Male pipe union. Up to 65 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" M	7.2	04749-xx	€ 106,53	1	-

Anti-condensing valve with thermostatic control. 1" Female connection. Up to 65 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1" F	7.2	04740-xx	€ 76,67	1	-

Anti-condensing valve with thermostatic control. 1"1/4 Swivel nut x 1"1/4 Male. Up to 65 kW.

Dimension	Kvs	Code	Price	s.b.	m.c.
1"1/4 Nut x 1"1/4 M	7.2	05741C-05-xx	€ 83,70	1	-

Anti-condensing valve with thermostatic control. 2" Swivel nut x 1"1/4 Male. Up to 65 kW.


Dimension	Kvs	Code	Price	s.b.	m.c.
2" Nut x 1"1/4 M	7.2	05741C-07-xx	€ 90,60	1	-

NOTES

"xx" shows the setting temperature of the valve:

45 start opening at 45°C
55 start opening at 55°C

60 start opening at 60°C
72 start opening at 72°C

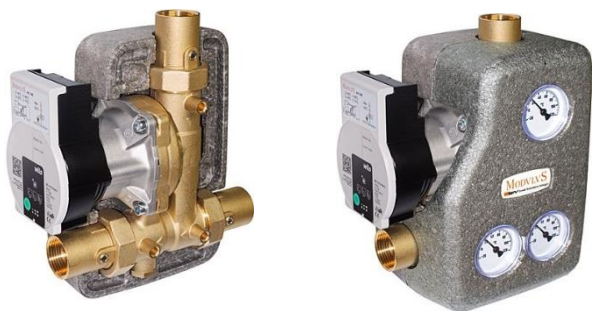

MODVLVS
DN25 SOLID FUEL

MCCS

**ANTI-CONDENSING RECIRCULATION PUMP
UNIT WITH THERMOSTATIC CONTROL**

Anti-condensing pump unit for power up to 90 kW. High efficiency synchronous circulating pump.

Nominal power with Δt 20°C	Dimension	Item	Code	Price with synchronous circ. pump Wilo Para SC/8	s.b.	m.c.
60 kW	1" F	745	204MCCS-xx-P8	€ 478,00	1	-
60 kW	1"1/4 F	745	205MCCS-xx-P8	€ 510,16	1	-
60 kW	28 mm	745	228MCCS-xx-P8	€ 509,27	1	-

"xx" shows the setting temperature of the valve:

45 start opening at 45°C

55 start opening at 55°C

60 start opening at 60°C

65 start opening at 65°C

72 start opening at 72°C

77 start opening at 77°C



MODVLVS
DN25 SOLID FUEL



MCCS 3

**ANTI-CONDENSING RECIRCULATION PUMP
UNIT WITH ELECTRONIC CONTROL**

Anti-condensing pump unit for power up to 90 kW. High efficiency synchronous circulating pump.

Nominal power with Δt 20°C	Dimension	Item	Code	Price with synchronous circ. pump Wilo Para SC/8		s.b.	m.c.
				ACD10	M21D (*)		
60 kW	1" F	745-3	204MCCS-P8-(ACC/M21)	€ 665,32	€ 545,80	1	-
60 kW	1"1/4 F	745-3	205MCCS-P8-(ACC/M21)	€ 697,49	€ 577,96	1	-
60 kW	28 mm	745-3	228MCCS-P8-(ACC/M21)	€ 696,60	€ 577,08	1	-

(*) M21D: 3 point actuator, an electronic external controller is required.

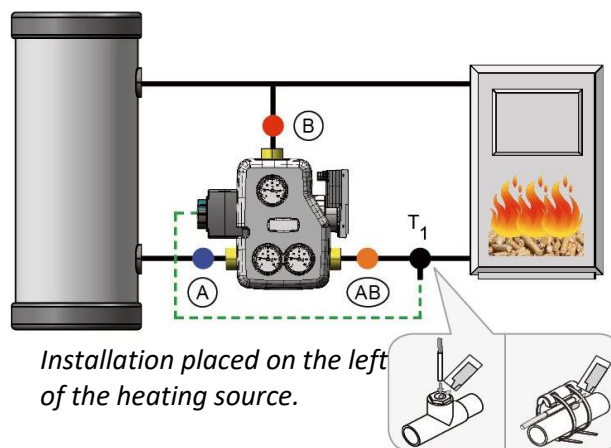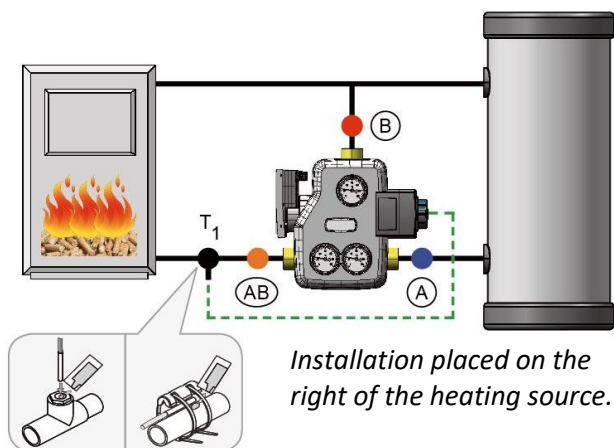



MODV SOL

FLOWMETERS

Art. 654

FLOWMETER

Flow regulator and flowmeter, male threaded on both ends. For solar thermal, heating and hydronics. Constant temperature 120°C (160°C per 20 sec.).

Dim.	Code	Price	s.b.	m.c.
3/4" M x 3/4" M	03654DN15-xx	€ 32,53	1	60
1" M x 1" M	04654DN15-xx	€ 34,15	1	60
22 mm x 22 mm	22654DN15-xx	€ 38,41	1	60
1" M x 1" M	04654DN20-xx	€ 50,91	1	60
1"1/4 M x 1"1/4 M	05654DN20-xx	€ 52,49	1	60
1"1/2 M x 1"1/2 M	06654DN20-xx	€ 65,87	1	60



FLOWMETERS

Art. 654P

FLOWMETER

Flow regulator and flowmeter, male threaded on one end and with swivel nut on the other. For solar thermal, heating and hydronics. Constant temperature 120°C (160°C per 20 sec.).

Dim.	Code	Price	s.b.	m.c.
3/4" M x 3/4" Nut	03654DN15P-xx	€ 35,05	1	60
1" M x 1" Nut	04654DN15P-xx	€ 35,55	1	60
1"1/4 M x 1"1/4 Nut	05654DN20P-xx	€ 56,69	1	60
1"1/2 M x 1"1/2 Nut	06654DN20P-xx	€ 63,24	1	60



FLOWMETERS

Art. 654

FLOWMETER SPECIFIC FOR THE NORTH AMERICAN MARKET

Flow regulator and flowmeter, male threaded on both ends, with scale in gallons per minute. For solar thermal, heating and hydronics. Constant temperature 120°C (160°C per 20 sec.).

Dim.	Code	Price	s.b.	m.c.
3/4" M x 3/4" M	03654DN15GPM-x	€ 33,48	1	60
1" M x 1" M	04654DN15GPM-x	€ 35,44	1	60

NOTES

"xx" means the flowmeter rate range:

Models DN15: 06 (1-6 L/min); 12 (2-12 L/min); 28 (8-28 L/min); 38 (8-38 L/min)

Models DN20: 42 (5-42 L/min); 70 (20-70 L/min); 90 (30-90 L/min)

For the models for north american market "x" means the flowmeter rate range:

DN15: 3 (0,5-3 US gpm); 8 (2-8 US gpm)



MODV SOL
SOLAR PUMP UNITS
ADAPTERS FOR CAPILLARY WELDING

Adapters Art. 654 for capillary welding, according to ASTM specifications.

<i>Dimension</i>	<i>Code</i>	<i>Price</i>	<i>s.b.</i>	<i>m.c.</i>
1/2 in.	03654ASTMSET	€ 2,98	1	-
3/4 in.	04654ASTMSET	€ 4,19	1	-



MODV SOL
SOLAR PUMP UNITS
NPT ADAPTERS

F/F GAS to NPT Adapter.

<i>Dimension</i>	<i>Code</i>	<i>Price</i>	<i>s.b.</i>	<i>m.c.</i>
G 3/4" x 3/4" NPT	03641NPTSET	€ 5,69	1	-
G 1" x 1" NPT	04641NPTSET	€ 6,93	1	-

STANDARD PRODUCTS

Price list 2026.2



bonetti rubinetterie valduggia s.r.l.

Loc. Molino Rastelli, 2 • IT-13018 Valduggia (VC) • Tel. +39 0163 48062 • Fax +39 0163 48188
<http://www.briv.it> • e-mail: info@briv.it • ISO 9001:2015 Cert. No. 0853/9



BALL VALVES

Art. 510

F/F full port ball valve with steel handle PVC covered
PN 30 (PN 25 for 2"1/2, 3" and 4"). Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/4"	00510	€ 6,47	20	240
3/8"	01510	€ 6,10	20	240
1/2"	02510	€ 7,38	14	168
3/4"	03510	€ 10,06	14	126
1"	04510	€ 14,79	8	48
1"1/4	05510	€ 22,62	6	36
1"1/2	06510	€ 37,20	4	24
2"	07510	€ 60,04	2	16
2"1/2	08510	€ 115,98	1	8
3"	09510	€ 158,20	1	6
4"	0A510	€ 271,10	1	4



BALL VALVES

Art. 51F

F/F full port ball valve with steel T-handle
PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/4"	0051F	€ 6,49	20	240
3/8"	0151F	€ 6,12	20	240
1/2"	0251F	€ 7,22	16	192
3/4"	0351F	€ 9,99	14	126
1"	0451F	€ 14,79	8	48
1"1/4	0551F	€ 22,96	6	36



BALL VALVES

Art. 560

M/F full port ball valve with steel handle PVC covered
PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/4"	00560	€ 6,30	20	240
3/8"	01560	€ 6,06	20	240
1/2"	02560	€ 7,31	14	168
3/4"	03560	€ 9,97	14	126
1"	04560	€ 14,67	8	48
1"1/4	05560	€ 22,96	6	36
1"1/2	06560	€ 36,92	4	24
2"	07560	€ 58,80	2	16



BALL VALVES

Art. 56F

M/F full port ball valve with steel T-handle
PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/4"	0056F	€ 6,32	20	240
3/8"	0156F	€ 6,09	20	240
1/2"	0256F	€ 7,14	16	192
3/4"	0356F	€ 9,90	14	126
1"	0456F	€ 14,66	8	48
1"1/4	0556F	€ 23,31	6	36



BALL VALVES

Art. 566

M/M full port ball valve with steel handle PVC covered
PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02566	€ 8,56	14	168
3/4"	03566	€ 11,26	14	126
1"	04566	€ 16,30	8	48



BALL VALVES

Art. 566F

M/M full port ball valve with steel T-handle
PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02566F	€ 8,40	16	192
3/4"	03566F	€ 11,20	14	126
1"	04566F	€ 16,32	8	48



BALL VALVES

Art. 569

M/F full port ball valve with union and steel handle PVC covered. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02569	€ 9,84	12	144
3/4"	03569	€ 13,96	5	75
1"	04569	€ 22,76	6	36



BALL VALVES

Art. 569F

M/F full port ball valve with union and steel T-handle PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02569F	€ 9,65	24	144
3/4"	03569F	€ 13,77	7	105
1"	04569F	€ 22,44	8	48



BALL VALVES

Art. 515

F/F full port ball valve with drain cock and steel handle PVC covered. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02515	€ 11,24	10	120
3/4"	03515	€ 14,15	12	108
1"	04515	€ 19,26	8	48



BALL VALVES

Art. 515F

F/F full port ball valve with drain cock and T-handle PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02515F	€ 11,09	12	144
3/4"	03515F	€ 13,96	16	144
1"	04515F	€ 18,98	6	72



BALL VALVES

Art. 552

Insulation valve
PN 6. Max temperature 110°C.

Dimension	Code	Price	s. box	m. cart.
1"	0266	€ 11,75	12	180
1"1/4	05552	€ 18,05	10	60

NOTES



HEAVY LINE BALL VALVES

Art. 520

F/F full port ball valve with steel handle PVC covered
Heavy body. PN 40. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02520	€ 8,66	14	168
3/4"	03520	€ 12,56	14	126
1"	04520	€ 18,21	12	72
1"1/4	05520	€ 28,48	6	36
1"1/2	06520	€ 44,20	3	18
2"	07520	€ 71,24	2	8



HEAVY LINE BALL VALVES

Art. 52F

F/F full port ball valve with steel T-handle
Heavy body. PN 40. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	0252F	€ 8,41	16	192
3/4"	0352F	€ 12,23	14	126
1"	0452F	€ 18,31	12	72
1"1/4	0552F	€ 28,96	6	36



HEAVY LINE BALL VALVES

Art. 520 SOLAR

Solar F/F full port ball valve with steel handle PVC covered
PN 10. Max temperature 120°C (160°C for 20 sec).

Dimension	Code	Price	s. box	m. cart.
3/4"	03520SOL	€ 13,48	1	12
1"	04520SOL	€ 18,78	1	12
1"1/4	05520SOL	€ 29,33	1	12



MODVLVS LINE
BALL VALVES
Art. 520 ISO

Nickel plated F/F full port ball valve, with insulation T-handle, individual package
PN 40. Max temperature 120°C.

Dimension	Code	Description	Price	s. box	m. cart.
1/2"	02520ISO	Ball valve art. 520 ISO	€ 14,78	1	12
3/4"	03520ISO	Ball valve art. 520 ISO	€ 19,52	1	12
1"	04520ISO	Ball valve art. 520 ISO	€ 25,92	1	12
1"1/4	05520ISO	Ball valve art. 520 ISO	€ 37,88	1	12
Attention: the articles "ModvlvS Line" have the same discounts in force on the ModvlvS price list					



MODVLVS LINE
BALL VALVES
Art. 520 TER

Nickel plated F/F ball valves with in-handle thermometer, individual package
PN 40. Max temperature 120°C.

Dimension	Code	Description	Price	s. box	m. cart.
1/2"	02520TER-(R/B)	Ball valve art. 520 TER	€ 20,03	1	12
3/4"	03520TER-(R/B)	Ball valve art. 520 TER	€ 24,77	1	12
1"	04520TER-(R/B)	Ball valve art. 520 TER	€ 31,17	1	12
1"1/4	05520TER-(R/B)	Ball valve art. 520 TER	€ 43,13	1	12
NOTE - Coded red: TER-R ; Coded blue: TER-B					
Attention: the articles "ModvlvS Line" have the same discounts in force on the ModvlvS price list					



CHECKBALL BALL VALVES

Art. 620



CHECKBALL BALL VALVES

Art. 62F

F/F ball valve with built-in check valve and steel handle PVC covered. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02620	€ 10,77	14	168
3/4"	03620	€ 13,95	14	126
1"	04620	€ 19,62	8	48

F/F ball valve with built-in check valve and asymmetric steel T-handle. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	0262F	€ 10,55	16	192
3/4"	0362F	€ 13,85	14	126
1"	0462F	€ 19,57	8	48



CHECKBALL BALL VALVES

Art. 660



CHECKBALL BALL VALVES

Art. 66F

M/F ball valve with built-in check valve and steel handle PVC covered. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02660	€ 10,67	14	168
3/4"	03660	€ 13,84	14	126
1"	04660	€ 19,47	8	48

M/F ball valve with built-in check valve and asymmetric steel T-handle. PN 16. Max temperature 95°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	0266F	€ 10,46	16	192
3/4"	0366F	€ 13,74	14	126
1"	0466F	€ 19,42	8	48

NOTES



BALL VALVES FOR WATER METERS

Art. 557

Ball valve for 1/2" (Qn 1.5) water meters. PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2" x 3/4" Nut	0328	€ 11,86	9	135



BALL VALVES FOR WATER METERS

Art. 553

Ball valve for 3/4" (Qn 2.5) water meters. PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
3/4" x 1" Nut	0319	€ 17,84	18	108



SIGILBLOCK

Patented locking device

Dimension	Code	Price	s. box	m. cart.
1st Size	DJRW03SET	€ 6,83	1	100
2nd Size	DJRW05SET	€ 6,83	1	100
3rd Size	DJRW07SET	€ 9,81	1	100

1st size: full port ball valves, dimensions up to 3/4" included.
2nd size: full port ball valves, dimensions 1" and 1"1/4.



SIGILBLOCK KEY

Unlocking key

Dimension	Code	Price	s. box	m. cart.
Sole Dimension	DRUCSET	€ 48,33	1	-



BALL VALVES FOR ENERGY METERS

Art. 518

F/F ball valve with M10x1 connection for temperature sensor Ø 5 mm. PN 30. Max temperature 150°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02518	€ 14,56	30	180
3/4"	03518	€ 18,49	9	135



102518

KITS FOR ENERGY METERS MODVLVS LINE

Kit for energy meters with distance piece made of plastic. Without energy meter.

Meter	Code		Price	s. box	m. cart.
1/2"	102518	Kit for energy meters 1/2" Qn 1,5	€ 47,65	1	12
3/4"	103518	Kit for energy meters 3/4" Qn 2,5	€ 63,81	1	12

Attention: the articles " ModvlvS Line " have the same discounts in force on the ModvlvS price list



BALL VALVES WITH FILTER

Art. 514



BALL VALVES WITH FILTER MODVLVS LINE

Art. 514

F/F ball valve with filter and steel handle PVC covered
PN 16. Max temperature 120°C. Multiple packaging.

Dimension	Code	Price	s. box	m. cart.
1/2"	02514	€ 32,03	5	75
3/4"	03514	€ 33,22	5	75
1"	04514	€ 46,96	8	48
1"1/4	05514	€ 76,90	4	24
1"1/2	06514	€ 121,41	on demand	

F/F ball valve with filter and steel handle PVC covered
PN 16. Max temperature 120°C. Single packaging.

Dimension	Code	Price	s. box	m. cart.
1/2"	02514/A	€ 35,31	1	-
3/4"	03514/A	€ 36,32	1	-
1"	04514/A	€ 50,99	1	-
1"1/4	05514/A	€ 82,57	1	-
1"1/2	06514/A	€ 130,32	1	-

Attention: the articles "ModvlvS Line" have the same discounts in force on the ModvlvS price list



BALL VALVES WITH FILTER

Art. 514F

F/F ball valve with filter and T-handle
PN 16. Max temperature 120°C.

Dimension	Code	Price	s. box	m. cart.
1/2"	02514F	€ 31,67	12	72
3/4"	03514F	€ 32,86	10	60
1"	04514F	€ 46,62	10	60

NOTES



**THERMOSTATIC
CONVERTIBLE
RADIATOR VALVES
TERMOSTAR
Art. 750H**

Thermostatic radiator angle type valve, with fixed Kvs-value
M30x1,5 compatible. 1/2" model: EN215 approved.
PN 10. Max temperature 120°C.

Dimension	Code	Price	s. box	m. cart.
3/8"	5001H	€ 10,71	1	152
1/2"	5002H	€ 12,33	1	152



**THERMOSTATIC
CONVERTIBLE
RADIATOR VALVES
TERMOSTAR
Art. 755H**

Thermostatic radiator straight type valve, with fixed Kvs-value
M30x1,5 compatible.
PN 10. Max temperature 120°C.

Dimension	Code	Price	s. box	m. cart.
3/8"	5051H	€ 11,39	1	152
1/2"	5052H	€ 13,20	1	152



**THERMOSTATIC
CONTROL HEAD
TERMOSTAR
Art. T10H**

Thermostatic head with liquid gas sensor
M30x1,5 compatible. EN215 approved. TELL certification.
Thermic hysteresis 0,34 K. Calc. V.T. coefficient: 0,29K.

Model	Code	Price	s. box	m. cart.
T10	5100H	€ 10,95	1	100



TELL
Thermostatic Efficiency Label
Reg. n. 10732-20220331



55 years of great results.

Technical development, flexibility and customer satisfaction are the cornerstones of the business model and the foundation of BRV's success on the national and international markets.



Quality is our leading goal.



Loc. Molino Rastelli, 2
13018 Valduggia (VC) - Italy

Tel. +39 0163 48062

Fax +39 0163 48188

www.br.v.it

e-mail: info@br.v.it

ISO 9001:2015 Cert. No. 0853/9



Distributed by:

